

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**10011M-07Q112-NF-G**

1 2 3 4 5

- 1: — Series No.
 2: — M:SMT Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — F:W/Cap In Tape&Reel

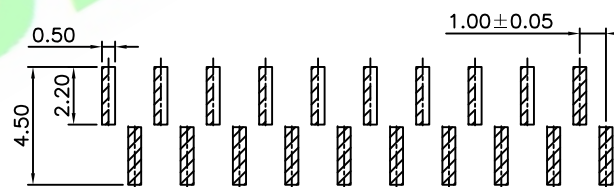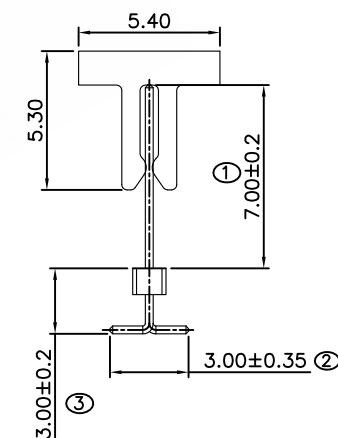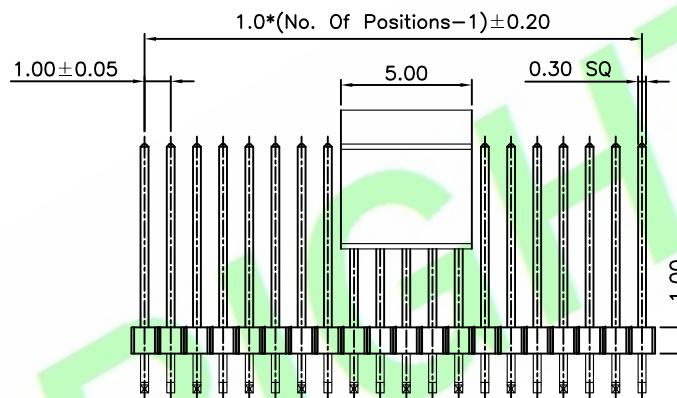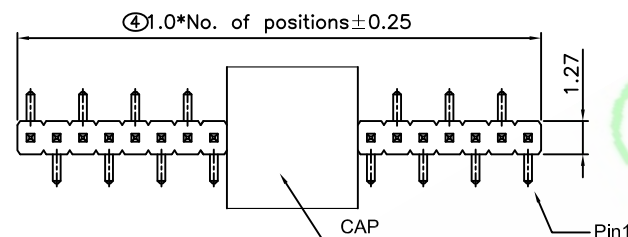

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE: LINEAR ANGLES		PART NO : 10011M-07Q112-NF-G	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED							
4X							DWG. NO.: GSN-14101S1-07-1PXP-50								
3X				CHKD.: Tony	x.: ±0.30 x': ±5.0°		TITLE : 1.0mm Pitch Pin Header SMT Type	SHEET: 1/1			A4				
2X					x.x: ±0.20 x.x': ±3.0°			SCALE: 1:1							
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15 x.xx': ±2.0°			DATE: 23-Jan-2015	UNIT: mm			THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10 x.xxx': ±1.0°										
1		2		3		4		5		6		7		8	