

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

10022M-XXX047-1X

1 2 3 4 5

1: Series No.

2: S: Straight Type

3: No. of Positions

4: A: Gold Flash

H: Selective Gold Plated

Q: Tin Plated

5: A: In bag


B: In Tube

C: In Tray

E: W/Cap In Tube

F: W/Cap In Tape&Reel

Recommended PCB Layout

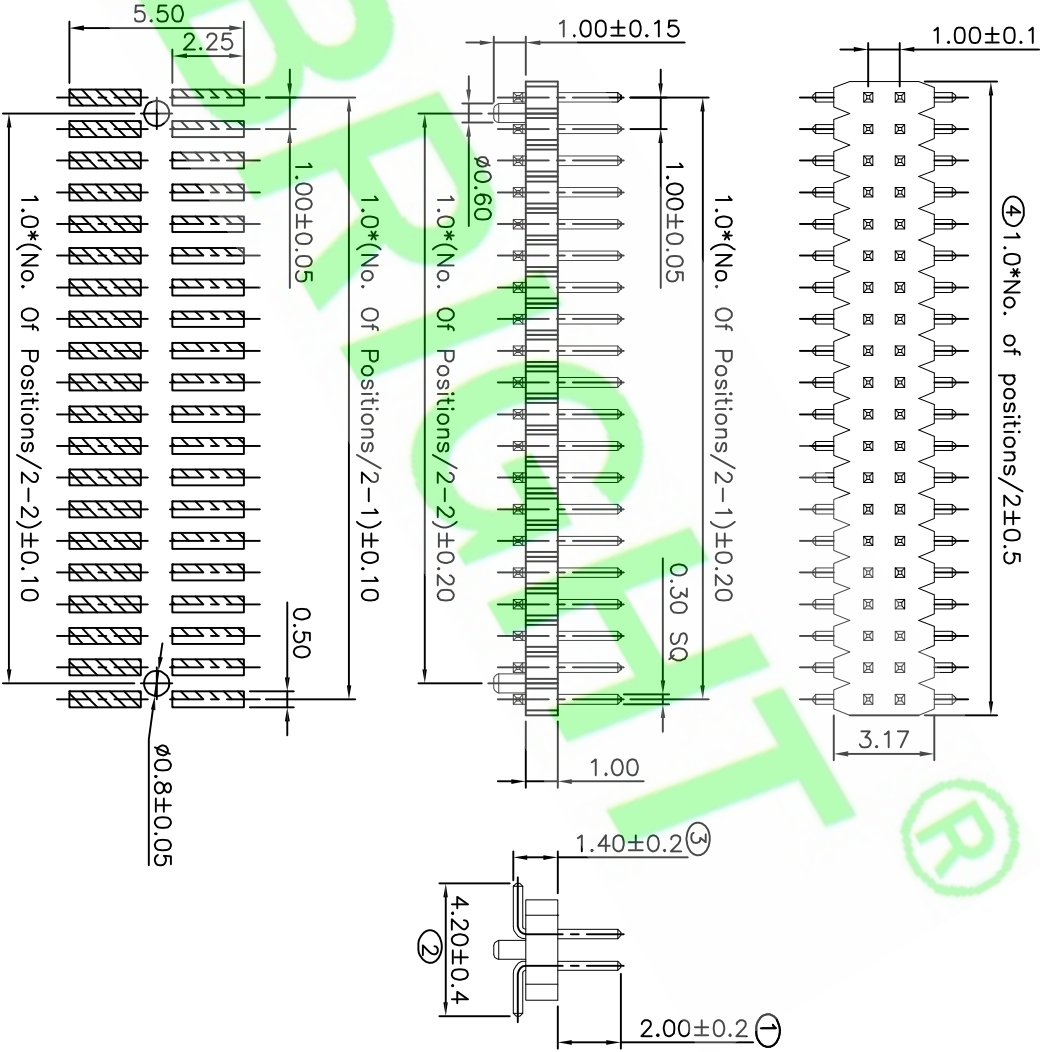

5X		DR.BY: 曾冬明	GENERAL TOLERANCE:	PART NO.: 10022M-XXX047-1X	HIBRIGHT	东莞市華晶電子有限公司
4X			LINEAR	DWG. NO.: RD0806-004	BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED	
3X			ANGLES			
2X			X: ±0.30 X: ±5.0°			
1X	ORIGINAL	joy chen	XX: ±0.20 XX: ±3.0°	TITLE: 1.0mm Pitch Pin Header SMT Type		
REV.	DESCRIPTION	DR.BY	APPD: 尹发江	DATE: 02-Jun-2008	SHEET: 1/1	SCALE: 1:1
1			ECN. NO.		UNIT: mm	THIRD ANGLE PROJECTION
2						
3						
4						
5						
6						
7						
8						