


Specifications:
Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:
 Current Rating:0.8 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40° ~ +105° C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 10022R-XXX059-X

- 1: Series No.
- 2: R:R/AType
- 3: No. of Positions
- 4: A:Gold Flash
- H:Selective Gold Plated
- Q:Tin Plated
- 5: A:In bag
- B:In Tube

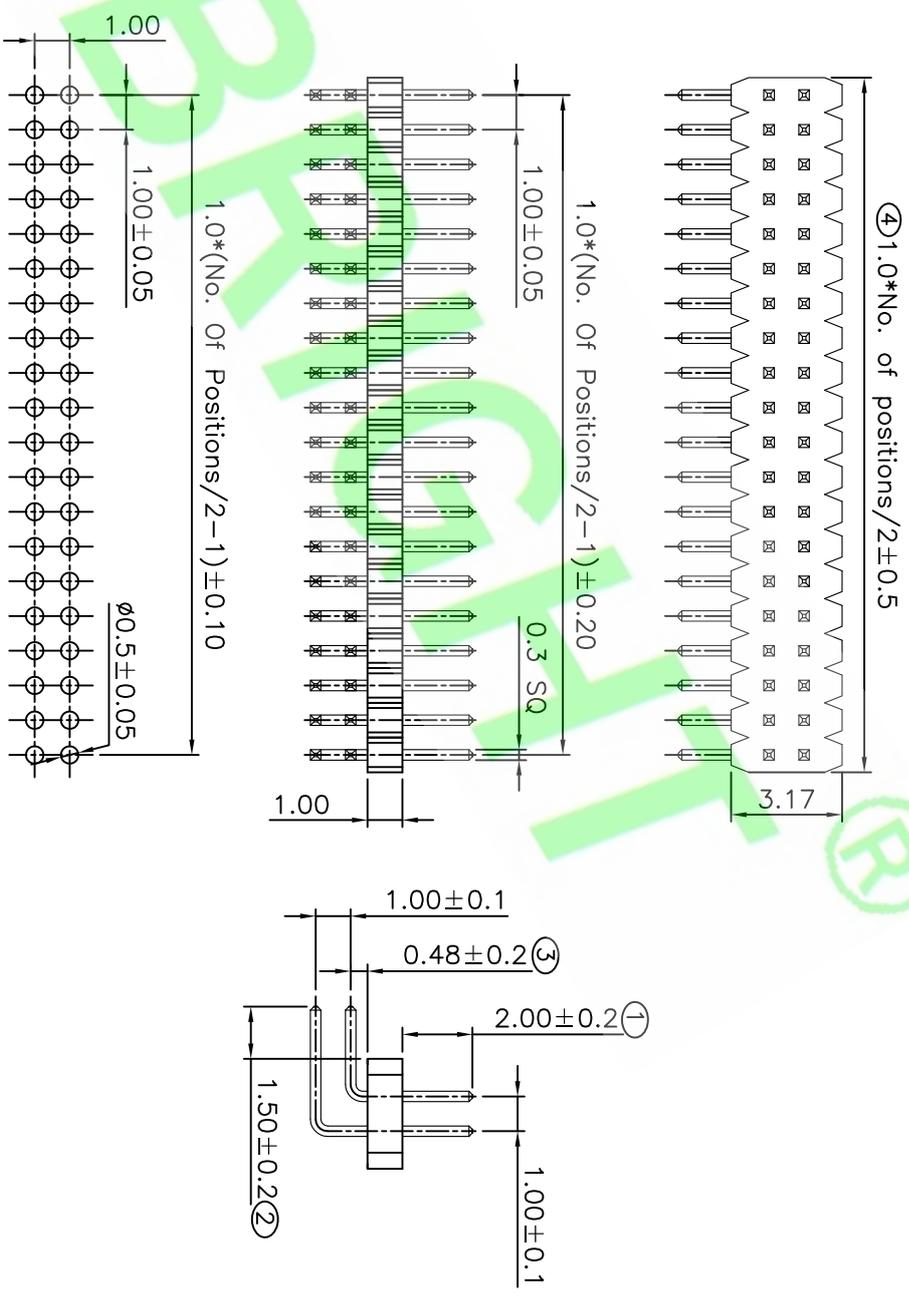

5X		DR BY:	曾冬明	GENERAL TOLERANCE:		PART NO : 10022R-XXX059-X	HIBRIGHT		東莞市華晶電子有限公司	
4X				LINEAR	ANGLES	DWG. NO.: RD0805-120	BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED	
3X		CHKD:	朱波	X: ±0.30	X: ±5.0°	TITLE :	1.0mm Pitch Pin Header R/A Type		SHEET: 1/1	
2X				XX: ±0.20	XX: ±3.0°	DATE: 24-May-2008	SCALE: 1:1		UNIT: mm	
1X	ORIGINAL		joy chen	XXX: ±0.15	XXX: ±2.0°		THIRD ANGLE PROJECTION		A4	
REV.	DESCRIPTION	DR BY	ECN. NO.	APPD	XXX: ±0.10	XXX: ±1.0°				
1		2		尹发江						