

Specifications:
 Material And Finish:
 Insulator:PA9T UL94V-0 Color:Beige
 Contact:Copper Alloy
 Plated:See Ordering Information

Rating:
 Current Rating:1.0 Amp
 Voltage Rating:125V AC/DC
 Operating Temperature Range:-40~+105°C






Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

A1250M-XXX-03-X

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q: Tin Plated
- 5: — B: In Tube
C: In Tray
E: W/Cap In Tube
F: W/Cap In Tape&Reel

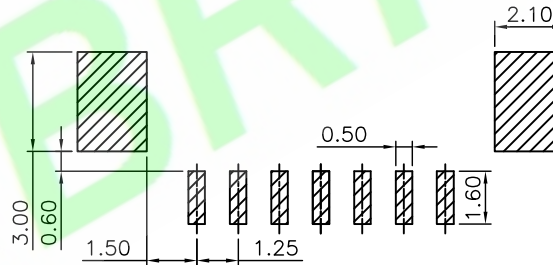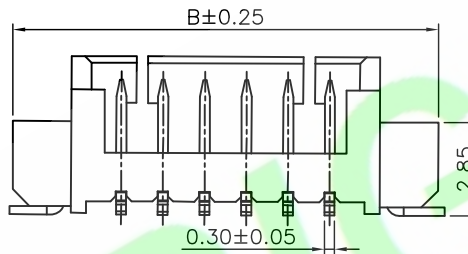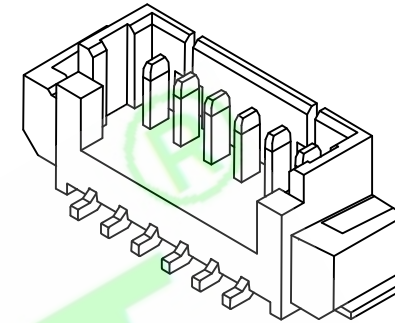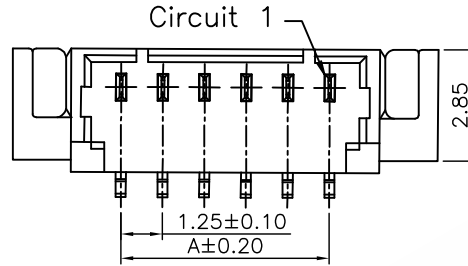

Recommended P.C.B Layout
 General Tolerance±0.05

Circuits	Dimensions	
	A	B
2	1.25	7.25
3	2.50	8.50
4	3.75	9.75
5	5.00	11.00
6	6.25	12.25
7	7.50	13.50
8	8.75	14.75
9	10.00	16.00
10	11.25	17.25
11	12.50	18.50
12	13.75	19.75
13	15.00	21.00
14	16.25	22.25
15	17.50	23.50
16	18.75	24.75
17	20.00	26.00
18	21.25	27.25

5X				DR.BY: Samson	GENERAL TOLERANCE:		PART NO : A1250M-XXX-03-X		HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	SHEET: 1/1 SCALE: 1:1 UNIT: mm	THIRD ANGLE PROJECTION	A4
4X				CHKD: Tony	LINEAR	ANGLES	DWG. NO.:					
3X				APPD: Billy	X.: ±5.0°	X.X: ±3.0°	TITLE : 1.25mm Pitch Wafer SMT Type					
2X					X.XX: ±0.20	X.XX': ±2.0°	DATE: 23-Oct-2017					
1X	ORIGINAL	Samson			X.XXX: ±0.10	X.XXX': ±1.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.									