

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Beige

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC





Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

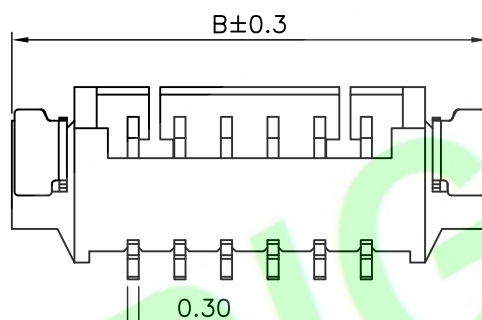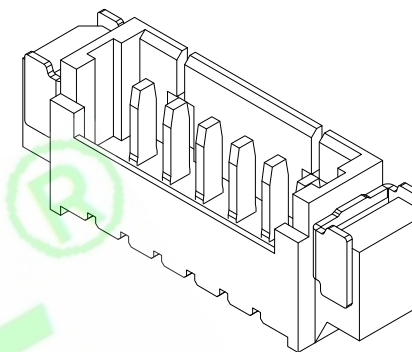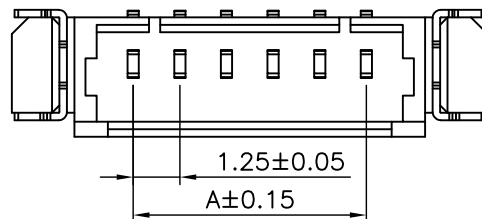


Ordering Information

A1250H-XXX-03-X

1 2 3 4 5

- 1: — Series No.
- 2: — H:Horizontal SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5: — A:In bag
B:In Tube
C:In Tray
D:In Tape&Reel

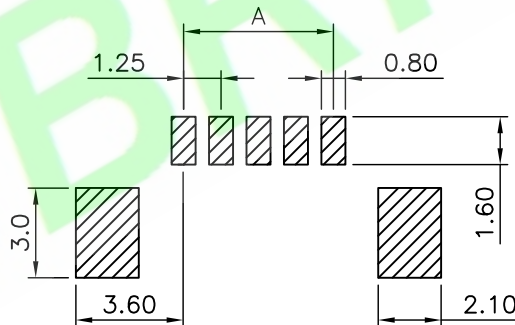

Recommended PCB Layout

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	1.25	7.75	9	10.00	16.50
3	2.50	9.00	10	11.25	17.75
4	3.75	10.25	11	12.50	19.00
5	5.00	11.50	12	13.75	20.25
6	6.25	12.75	13	15.00	21.50
7	7.50	14.00	14	16.25	22.75
8	8.75	15.25	15	17.50	24.00

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1250H-XXX-03-X
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :
2X					x.x: ±0.20	x.x': ±3.0°	1.25mm Pitch Wafer Horizontal SMT Type
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 24-Sep-2014
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4