

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Contact:Brass

Shell:Steel With Nickel Plated.

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:500V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**DB06S-XXFX-01-X**

1 2 3 4 5 6

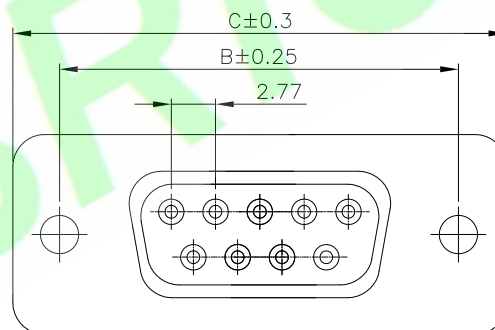
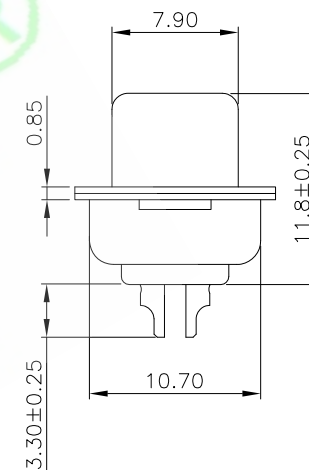
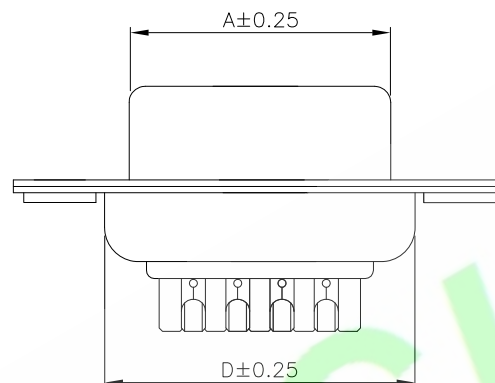
1: — Series No.

2: — S: Straight Type


3: — No. of Positions

4: — F: FeMale

5: — 5: Selective Gold Plated

6: — A: In Bag
C: In Tray

Pin	A	B	C	D
09	16.30	24.99	30.80	19.30
15	24.60	33.30	39.20	27.60
25	38.30	47.04	53.10	41.10
37	54.80	63.50	69.34	57.30

5X				DR.BY.:		GENERAL TOLERANCE:	PART NO : DB06S-XXFX-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Jack		LINEAR	DWG. NO.:		
3X				CHKD.:	Kenry	ANGLES	TITLE :	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
2X						X.: ±0.38	D-SUB FeMale Straight Type		
1X	ORIGINAL	Jack		APPD.:	Billy	X.X: ±0.35	DATE: 3-Mar-2015	THIRD ANGLE PROJECTION  A4	
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XX: ±0.25			
						X.XXX: ±0.13			