

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0, BLACK

Contact:BRASS

Crust:Spcc,Plated Ni

Screw:Steel,Plated Ni

Rating:

Current Rating:3A Amp

Voltage Rating:300V

Operating Temperature Range:-40°~+100°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:2000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

DB05R-XXFX-XX-X

1 2 3 4 5 6 7

1:— Series No.

2:— R/R/A Type

3:— No. of Positions

4:— F:Female

5:— 2:Contact 5u" Gold /Tail Sn120u"~200u"

5:Contact Gold flash/Tail Sn120u"~200u"

6:Contact 10u" Gold/Tail Sn120u"~200u"

7:Contact 15u" Gold/Tail Sn120u"~200u"

8:Contact 30u" Gold/Tail Sn120u"~200u"







6:— 01:W/O Screw

02:With Screw

7:— A:In Bag

B:In Tube

C:In Tray

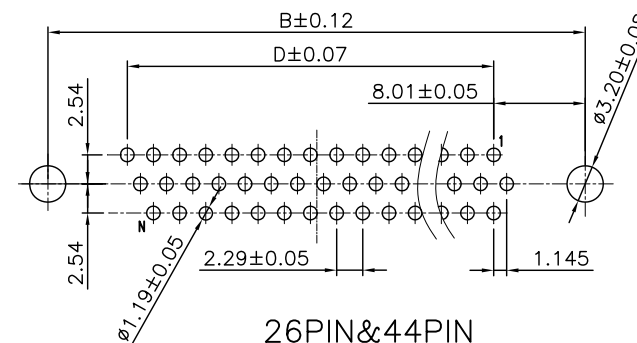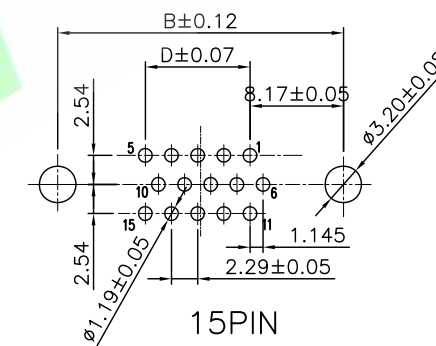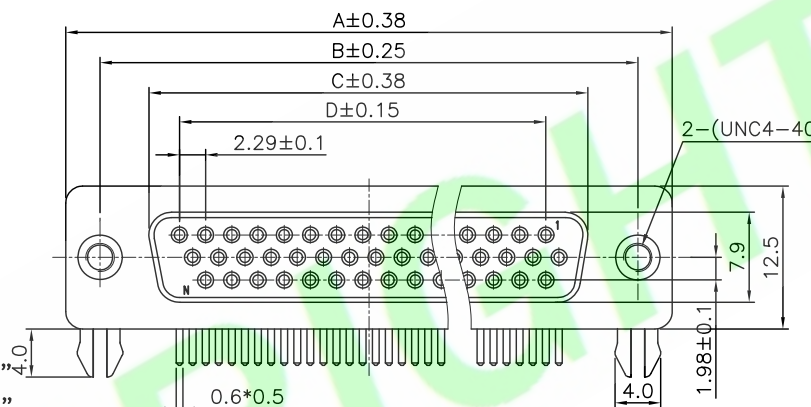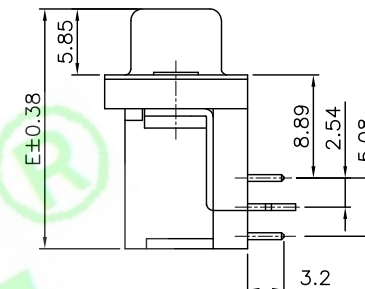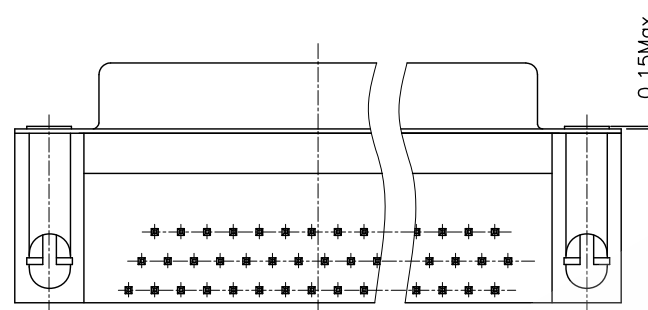

P/N	A	B	C	D	E
DB05R-15FX-XX-X	30.80	25.00	16.35	9.16	21.86
DB05R-26FX-XX-X	39.20	33.30	24.66	18.32	21.86
DB05R-44FX-XX-X	53.04	47.04	38.40	32.06	21.86

5X				DR.BY: Samson	GENERAL TOLERANCE:	PART NO : DB05R-XXFX-XX-X	HJBRIGHT 東莞市華晶電子有限公司
4X				CHKD: Tony	LINEAR	DWG. NO.:	BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
3X				APPD: Billy	ANGLES	TITLE : D-SUB HD,RIGHT ANGLE ,SOLDER TAIL FEMALE	SHEET: 1/1
2X	Add Code	Kenry	2014-10-30		X.: ±0.50	X': ±3.0°	SCALE: 1:1
1X	ORIGINAL	Samson			X.X: ±0.38	X.X': ±2.0°	UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.25	X.XX':	THIRD ANGLE PROJECTION
					X.XXX:	X.XXX':	A4