

Specifications:

Material And Finish:

Insulator:PBT Thermoplastic,30% Glass Filled,
UL94V-0 Rated,Color:Black
Contact:Brass
Contact Finish:Full Gold Flash
With:#4-40 Threaded Rivets
Shell:Steel Material,Front Nickel Finished
Back Shell Tin Finished

Rating:

Current Rating:5.0 Amp
Operating Temperature Range:-55°C~+105°C




Electrical:


Contact resistance:30m Ohm Max
Insulator resistance:5000M ohm min.
Withstanding Voltage:1000V AC min.

Ordering Information

DB17S-50MA-01-X
1 2 3 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — M: male
5: — A: Gold flash
6: — B: In Tube
C: In Tray

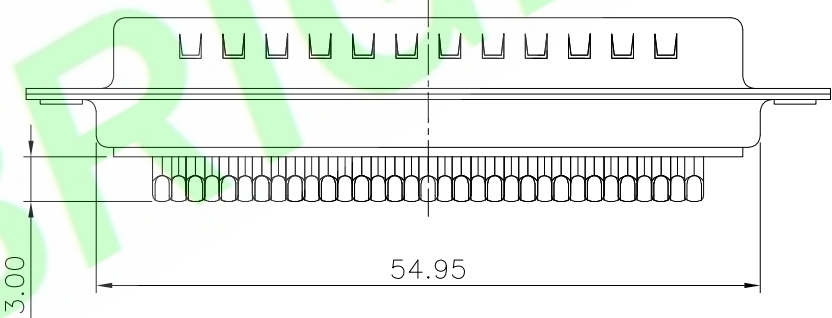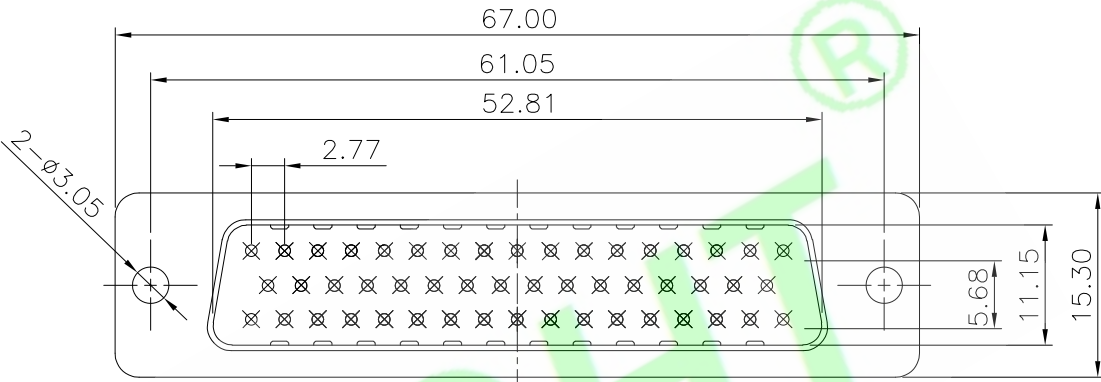

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : DB17S-50MA-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Bruce	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.: ±0.38	X': ±2.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X				Tony	X.X: ±0.35	X.X': ±1.0°	DB50M 传统焊线	SCALE: 1:1	
1X	ORIGINAL	Bruce		APPD.:	X.XX: ±0.25	X.XX': ±0.5°	DATE: 27-Jul-2018	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX':			A4