

Specifications:**Material And Finish:**

Insulator:PBT Thermoplastic,30% Glass Filled,
UL94V-0 Rated,Color:Black

Contact:Brass

Contact Finish:Full Gold Flash

With:#4-40 Threaded Rivets

Shell:Steel Material,Front Nickel Finished

Back Shell Tin Finished

Rating:

Current Rating:5.0 Amp

Operating Temperature Range:-55°C~+105°C

Electrical:

Contact resistance:30m Ohm Max



Insulator resistance:5000M ohm min.


Withstanding Voltage:1000V AC min.

**Ordering Information**

DB17S-50FA-01-X
1 2 3 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — F: Female
5: — A: Gold flash
6: — B: In Tube
C: In Tray

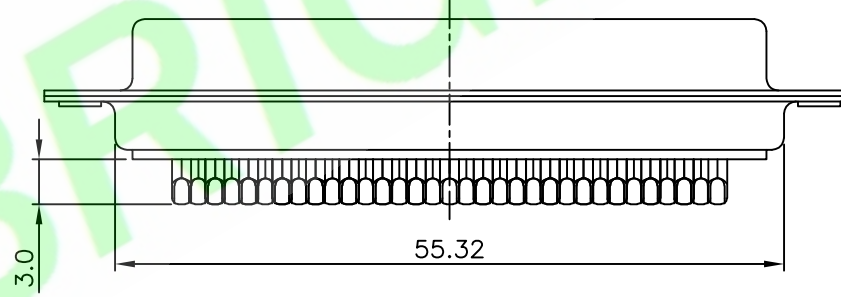

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : DB17S-50FA-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.38	X': ±2.0°	TITLE : DB50F 传统焊线式	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.35	X.X': ±1.0°	DATE: 24-Jul-2018	SCALE: 1:1	
1X	ORIGINAL	Bruce			X.XX: ±0.25	X.XX': ±0.5°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX':			A4