

Specifications:**Material And Finish:**

Insulator:PBT THERMOPLASTIC,30% GLASS FILLED,
UL94V-0 RATED,COLOR:WHITE

Contact:Brass

CONTACT FINISH:FULL GOLD FLASH

Rating:

Current Rating:5.0 Amp

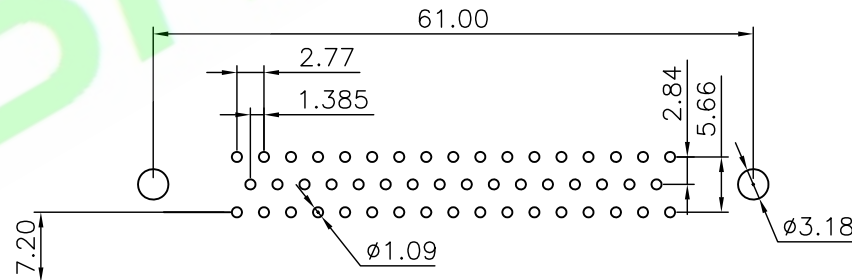
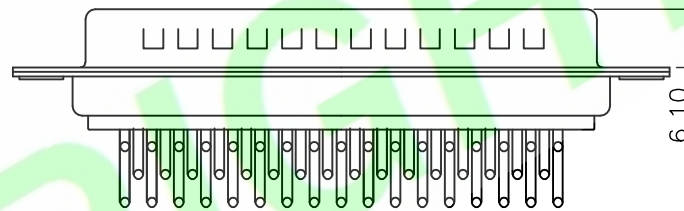
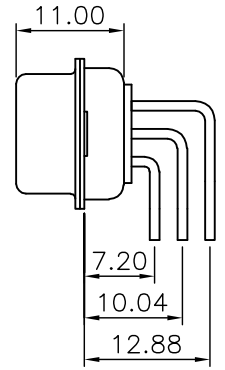
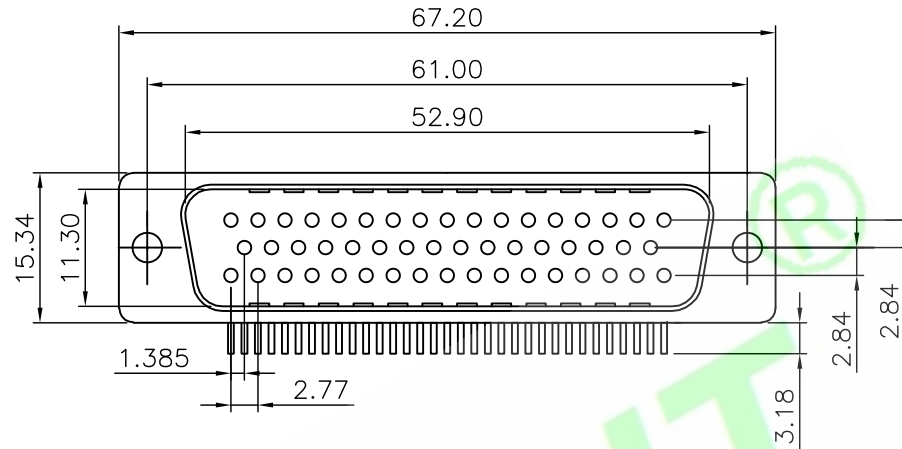
Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:30m Ohm Max


Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

**Ordering Information**

DB17R-50MA-01-X
1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — M:Male
5: — A:Gold flash
6: — A:In Bag
B:In Tube
C:In Tray

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : DB17R-50MA-01-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES				
3X				CHKD.: Tony	X.: ±0.38	X': ±2.0°	TITLE : HDR 50M 折弯7.20mm		SHEET: 1/1		A4
2X					X.X: ±0.35	X.X': ±1.0°			SCALE: 1:1		
1X	ORIGINAL	Bruce		APPD.:	X.XX: ±0.25	X.XX': ±0.5°	DATE: 24-Jul-2015		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX':					