

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0, Colour:Black

Crust:Steel,Plated Ni

Rating:

Current Rating:3.0 Amp

Voltage Rating:500V


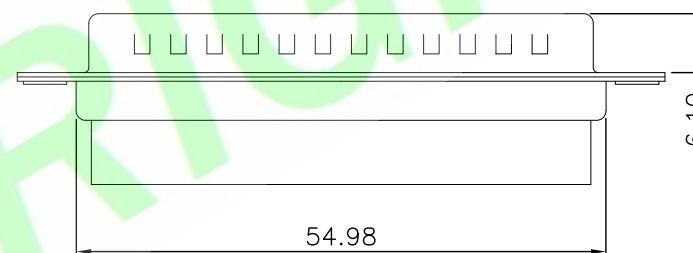
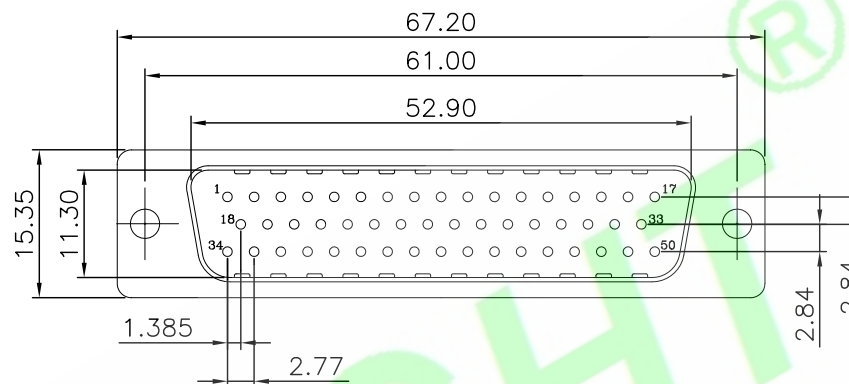
Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:500V AC/Minute

**Ordering Information**

DB14S-XXMX-01-X

1	2	3	4	5	6
---	---	---	---	---	---

- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — M: male
 5: — 5: Contact Gold flash/Tail Sn120u"~200u"
 6: Contact 10u" Gold/Tail Sn120u"~200u"
 7: Contact 15u" Gold/Tail Sn120u"~200u"
 8: Contact 30u" Gold/Tail Sn120u"~200u"
 6: — A: In Bag
 B: In Tube
 C: In Tray

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : DB14S-XXMX-01-X		HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司		
4X				Kenry	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.50	x': ±3.0°	TITLE : D-SUB HD,RIGHT ANGLE ,SOLDER TAIL MALE		SHEET: 1/1		A4
2X				Tony	x.x: ±0.38	x.x': ±2.0°			SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.25	x.xx':	DATE: 24-Apr-2016		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx':					