

Specifications:

Material And Finish:

Insulator: PBT UL94V-0, Colour: Black

Contact: Phosphor Bronze

Crust: Steel, Plated Ni

Screw: Steel, Plated Ni

Rating:

Current Rating: 5.0 Amp

Voltage Rating: 500V

Operating Temperature Range: -55°C~+105°C

Electrical:

Contact resistance: 30m Ohm Max At DC100mA

Insulator resistance: 1000M ohm min.




Withstanding Voltage: 500V AC/Minute

Ordering Information

DB12S-XXFX-01-X

1 2 3 4 5 6

- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — F: Female
 5: — 5: Contact Gold flash/Tail Sn120u"~200u"
 6: Contact 10u" Gold/Tail Sn120u"~200u"
 7: Contact 15u" Gold/Tail Sn120u"~200u"
 8: Contact 30u" Gold/Tail Sn120u"~200u"
 6: — A: In bag
 B: In Tube
 C: In Tray

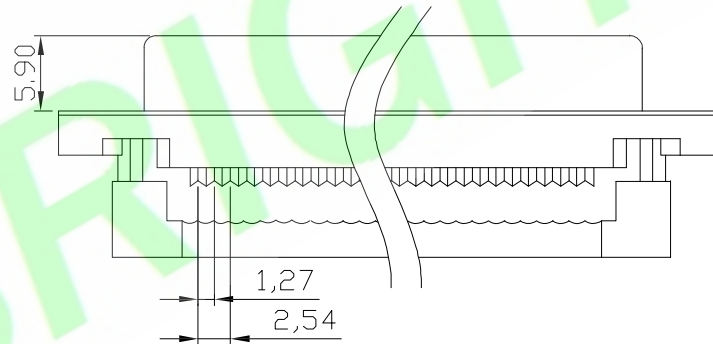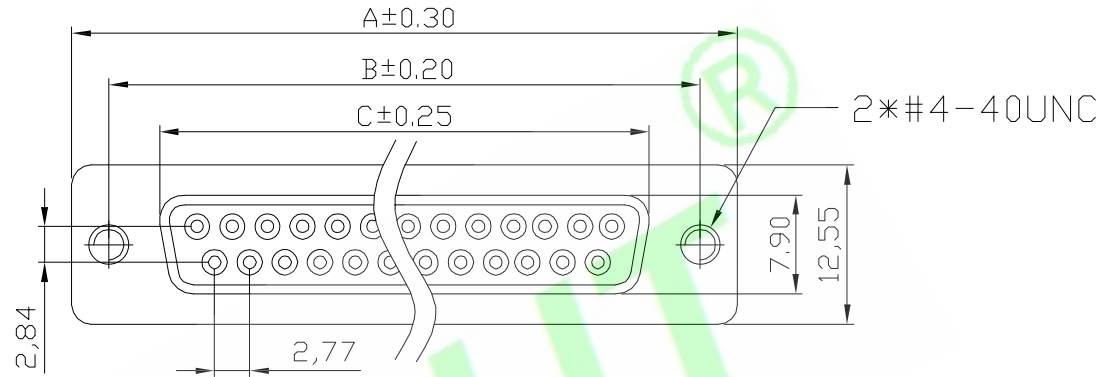

Pin	A	B	C
09	30.80	24.99	16.30
15	39.20	33.30	24.60
25	53.10	47.04	38.30
37	69.34	63.50	54.80

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : DB12S-XXFX-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Kenry	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.: ±0.50	X': ±3.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X				Tony	X.X: ±0.38	X.X': ±2.0°	D-SUB 压线式内扣 母头	SCALE: 1:1	
1X	ORIGINAL	Kenry		APPD.:	X.XX: ±0.25	X.XX':	DATE: 24-Jul-2015	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX':			A4