

Specifications:

Material And Finish:

Insulator: PBT UL94V-0, Colour: Black

Shell: Steel, Nickel Plated

Rating:

Current Rating: 3.0 Amp




Voltage Rating: 500V

Operating Temperature Range: -55°~+105°C

Electrical:

Insulator resistance: 5000M ohm min.

Withstanding Voltage: 500V AC/Minute

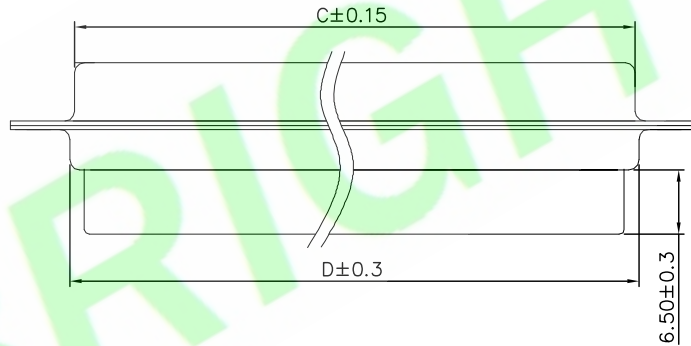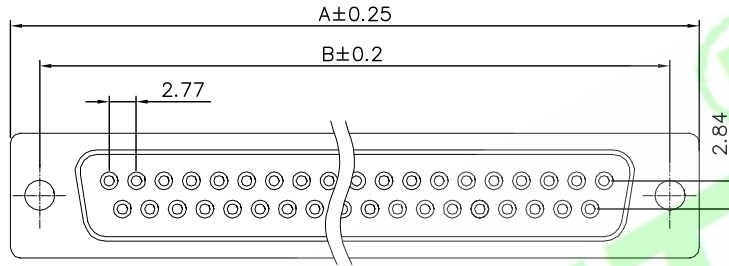


Ordering Information

DB11S-XXF5-01-X
1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — F: Female
- 5: — A: In Bag
B: In Tube
C: In Tray

P/N	A	B	C	D
DB11S-09F5-01-X	30.80	25.00	16.30	19.20
DB11S-15F5-01-X	39.20	33.30	24.75	27.50
DB11S-25F5-01-X	53.04	47.04	38.35	41.30
DB11S-37F5-01-X	69.40	63.50	54.80	57.30

5X				DR.BY.: Kenry	GENERAL TOLERANCE:	PART NO : DB11S-XXF5-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED  THIRD ANGLE PROJECTION	A4
4X					LINEAR	DWG. NO.:		
3X				CHKD.: Tony	ANGLES	TITLE :		
2X					X.: ±0.50 X': ±3.0°	D-SUB HD, RIGHT ANGLE ,SOLDER TAIL FEMALE		
1X	ORIGINAL	Kenry		APPD.: Billy	X.X: ±0.38 X.X': ±2.0°			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.25 X.XX':	DATE: 24-Jul-2015	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
	1	2	3	4	5	6	7	8