

Specifications:**Material And Finish:**

Insulator:PA6T

High Temperature Resistant Thermoplastic
UL94V-0 Color:Black

Contact:Copper alloy

Rating:

Current Rating:2.5 Amp,30 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-20°~+105°C

Electrical:

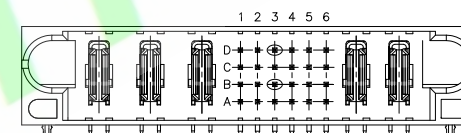
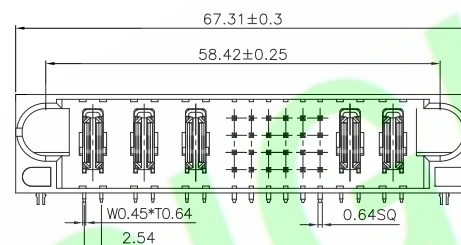
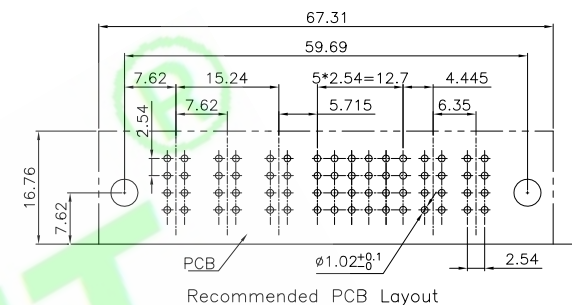
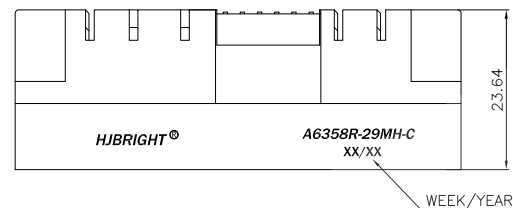

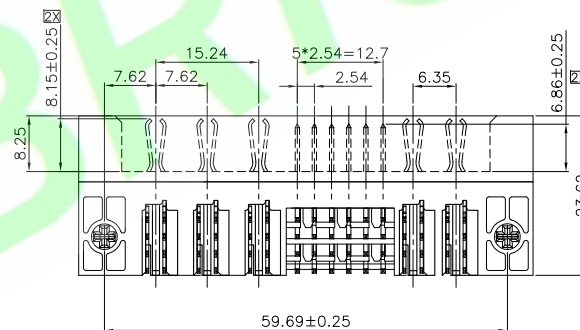
Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**A6358R-29MH-C**

1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — M:Male
5: — H:Selective Plated 30u" Gold
in contact area; Tin In tail area;
Nickel overall
6: — C:In Tray

Recessed Signal PIN B3&D3
Length Of 5.60±0.10

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A6358R-29MH-C	HJBRIGHT® 华海电子科技有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.38	x': ±5.0°	TITLE :6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A Male Power Connector	SHEET: 1/1			A4
2X	Update The Power PIN Size	Kenry	19-Feb-2016		x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Kenry		x.xx: ±0.25	x.xx': ±2.0°	UNIT: mm					
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	x.xxx: ±0.15	x.xxx': ±1.0°		DATE: 1-Jun-2015	THIRD ANGLE PROJECTION		