

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Durability:3000 Time

Ordering Information

S12722H-XXX43A-0X

1 2 3 4 5

1: — Series No.

2: — H:Horizontal SMT Type

3: — No. of Positions

4: — A:Gold Flash

C:5u"Gold on Contact;Gold Flash on tail

D:10u"Gold on Contact;Gold Flash on tail

K:15u"Gold on Contact;Gold Flash on tail

F:20u"Gold on Contact;Gold Flash on tail

H:Gold Flash on Contact;Matte Tin on tail

T:10u"Gold on Contact;Matte Tin on tail

Y:30u"Gold on Contact;Matte Tin on tail.


S:Matte Tin Plated.

5: — A:In bag


B:In Tube

C:In Tray

D:In Tape&Reel

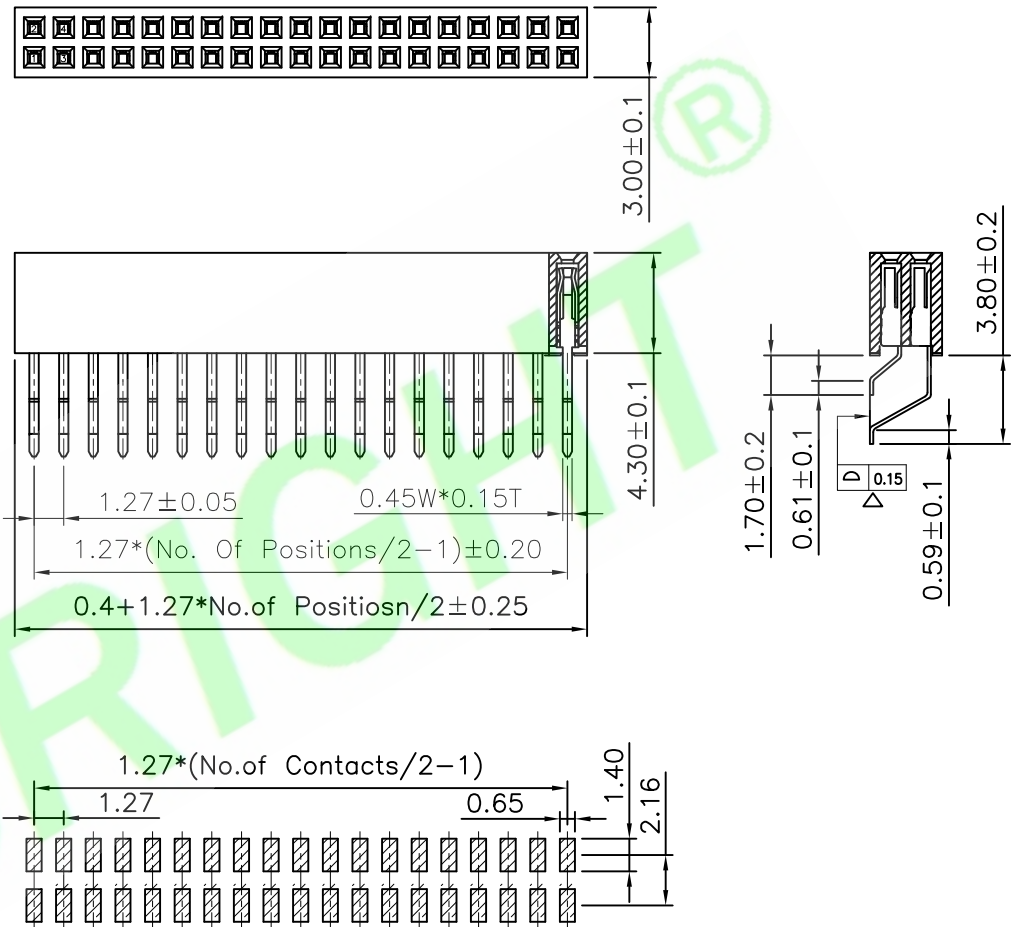

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO.: S12722H-XXX43A-0X	HJBRIGHT 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD1206-012		
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE:	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	新增重点管控尺寸, 如符号“△”表示。	Samson	2012-12-10	Tony	X.X: ±0.20	X.X': ±3.0°	1.27mm Pitch PCB	SCALE: 1:1	
1X	ORIGINAL	joy chen		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	Socket Header Horizontal SMT Type	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 26-Jun-2012		A4