



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 5:— A:In bag
B:In Tube
C:In Tray
D:Tape&Reel+Mylar
E:W/Cap In Tube
F:W/Cap In Tape&Reel

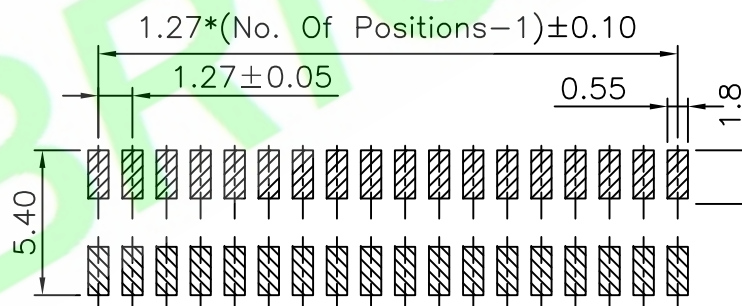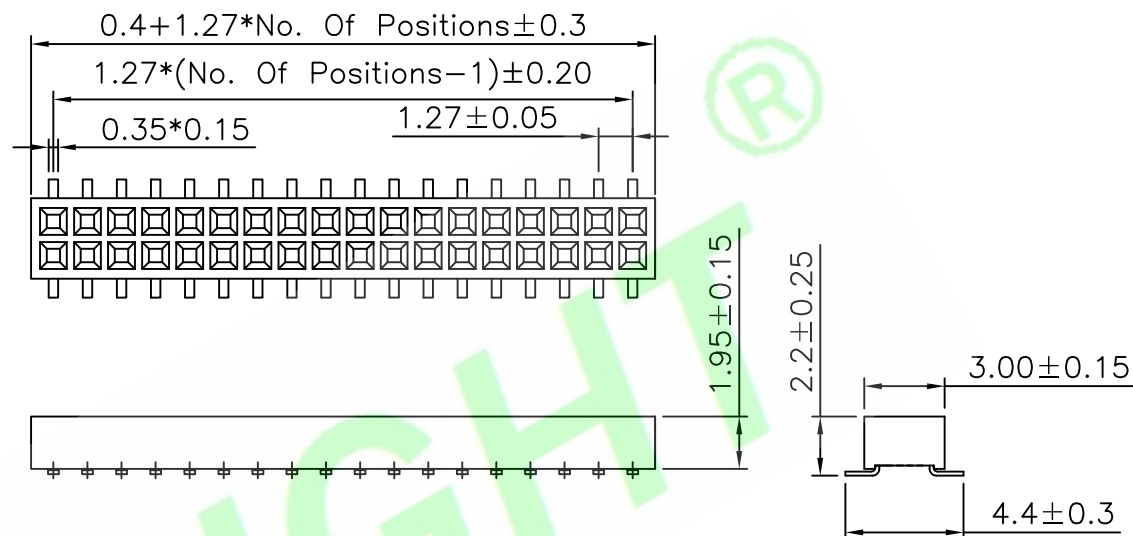

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12742M-XXX20-0X		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0805-051				
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type				
2X					x.x: ±0.20	x.x°: ±3.0°					
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 13-May-2008		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°			SCALE: 1:1		
									UNIT: mm		