

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40° ~ +105° C

Electrical:



Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

S12762M-XXX48-0X

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q: Tin Plated
- 6: — A: In bag
B: In Tube
C: In Tray
E: W/Cap In Tube
F: W/Cap In Tape&Reel

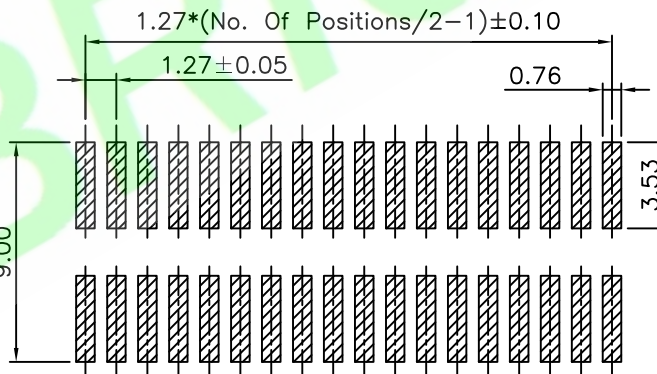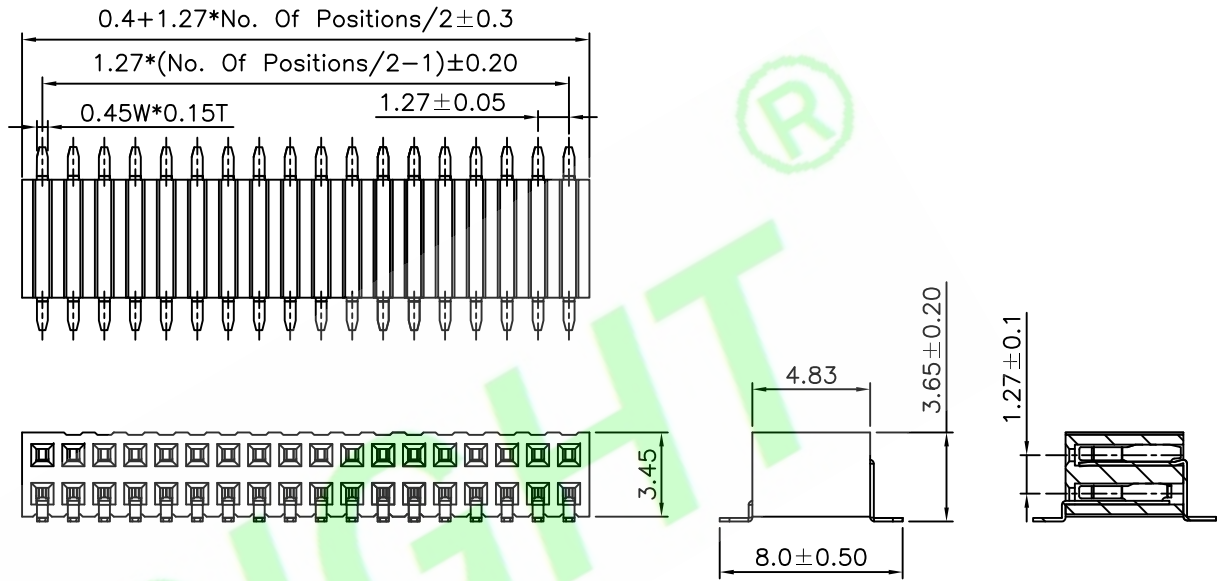

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12762M-XXX48-0X		HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.: RD0807-009		
3X				APPD.: Billy	x.: ± 0.30	x': $\pm 5.0^\circ$	TITLE : 1.27mm Pitch PCB Socket Header SMT Type Side Entry		SHEET: 1/1
2X					x.x: ± 0.20	x.x': $\pm 3.0^\circ$	DATE: 01-Jul-2008		SCALE: 1:1
1X	ORIGINAL	Samson			x.xx: ± 0.15	x.xx': $\pm 2.0^\circ$			UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ± 0.10	x.xxx': $\pm 1.0^\circ$			THIRD ANGLE PROJECTION

A4