

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:1000M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information**S20062M-XXX43-XX**

1 2 3 4 5 6

- 1: — Series No.
 2: — M:SMT Type
 3: — No. of Positions
 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
 5: — 0:W/O Peg
 1:W/Peg
 6: — A:In bag
 B:In Tube
 C:In Tray
 E:W/Cap In Tube
 F:W/Cap In Tape&Reel

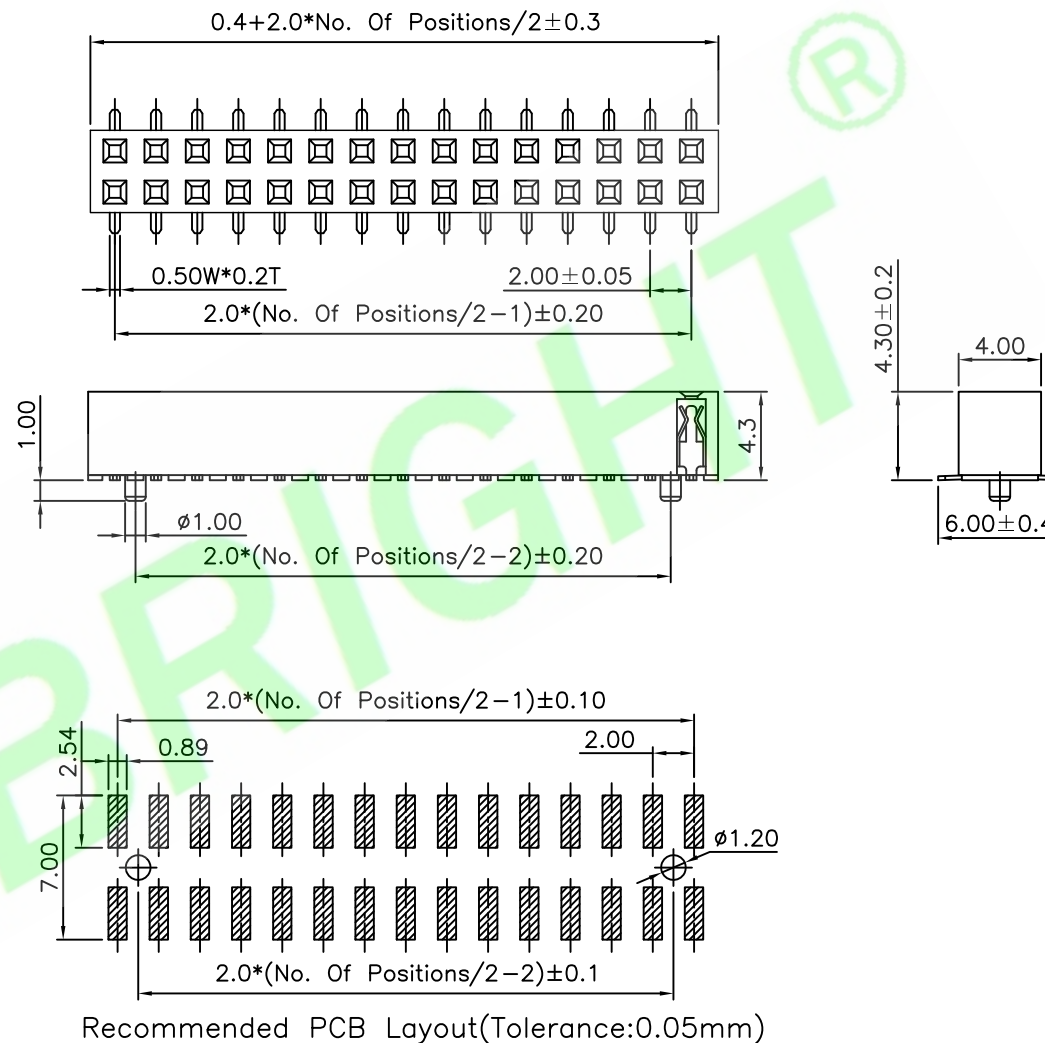

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S20062M-XXX43-XX	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.: RD0807-028				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Socket Header SMT Type	SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 05-Jul-2008	THIRD ANGLE PROJECTION			