

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S202422S-XXX63-NX**

1 2 3 4 5 6

- 1:— Series No.
 2:— S:Straight Type
 3:— No. of Positions(02-80)
 4:— A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
 5:— N:Nylon 6T
 6:— A:In bag
 B:In Tube
 C:In Tray

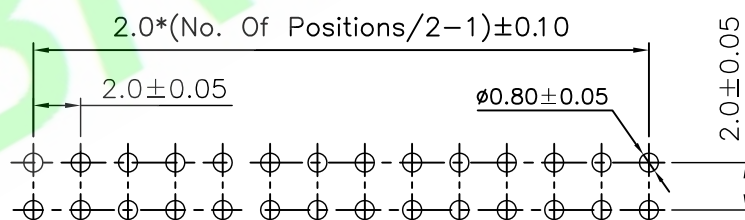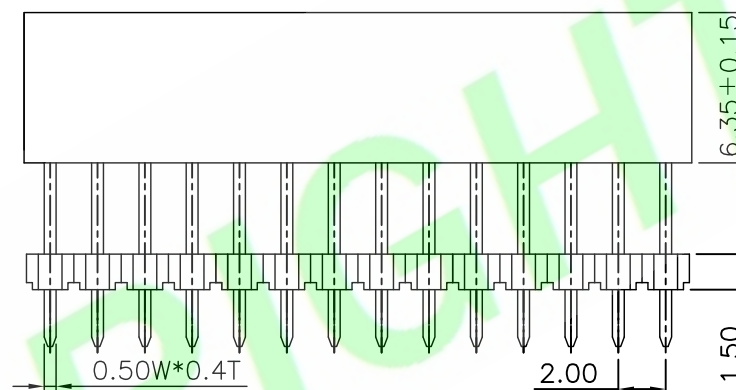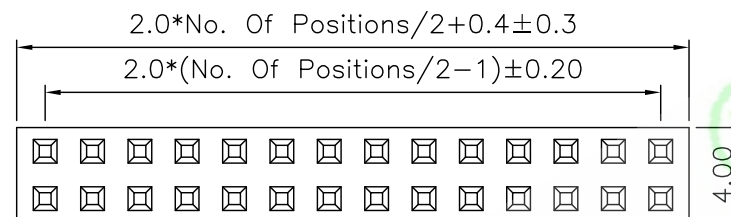

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S202422S-XXX63-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	X.: ± 0.30	X': $\pm 5.0^\circ$	TITLE : 2.0mm Pitch PCB Socket Header Straight Type	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X					X.X: ± 0.20	X.X': $\pm 3.0^\circ$		SCALE: 1:1			
1X	ORIGINAL	Kenry			X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$	DATE: 1-Mar-2016				