


Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: In Tube
C: In Tray

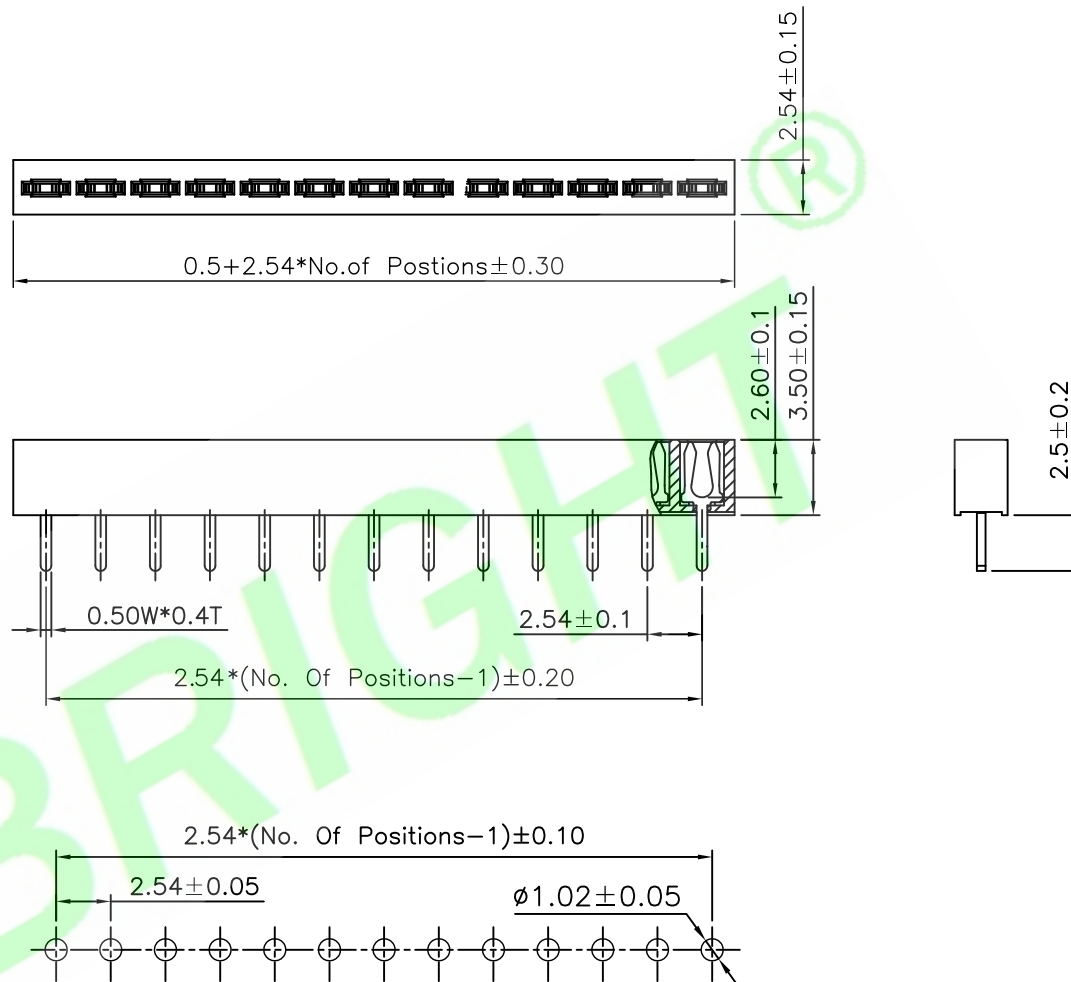

Recommended PCB Layout

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : S25571S-XXX35-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0807-173			
3X			CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type	SHEET: 1/1		A4
2X			Tony	X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 16-JUL-2008	THIRD ANGLE PROJECTION	