




Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
H:Contact Gold flash,Solder Tail:Matte Tin
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

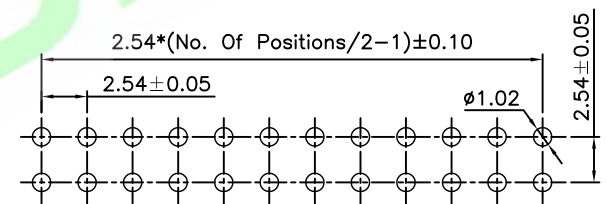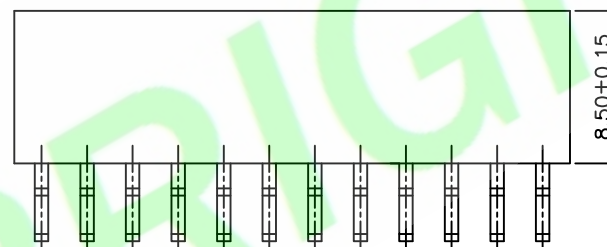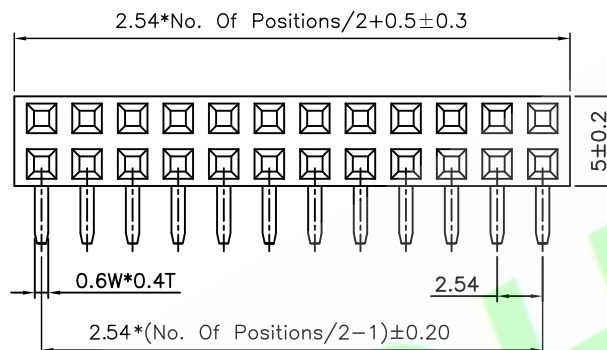

Recommended PCB Layout



5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : S25412R-XXX85-CX	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X			Samson	LINEAR	ANGLES	DWG. NO.:				
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch PCB Socket Header R/A Type				
2X			Tony	x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 6-Aug-2014	SHEET: 1/1		A4
							SCALE: 1:1	UNIT: mm		