

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S25512M-XXX71-XX





1 2 3 4 5 6

- 1: Series No.
- 2: M:SMT Type
- 3: No. of Positions
- 4: A:Gold Flash


C:5u"Gold on Contact;Gold Flash on tail
 D:10u"Gold on Contact;Gold Flash on tail
 F:20u"Gold on Contact;Gold Flash on tail
 H:Gold Flash on Contact;Matte Tin on tail
 T:10u"Gold on Contact;Matte Tin on tail
 S:Matte Tin Plated.
 Q:Tin Plated

- 5: 0:W/O Peg
1:W/Peg

- 6: A:In Bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

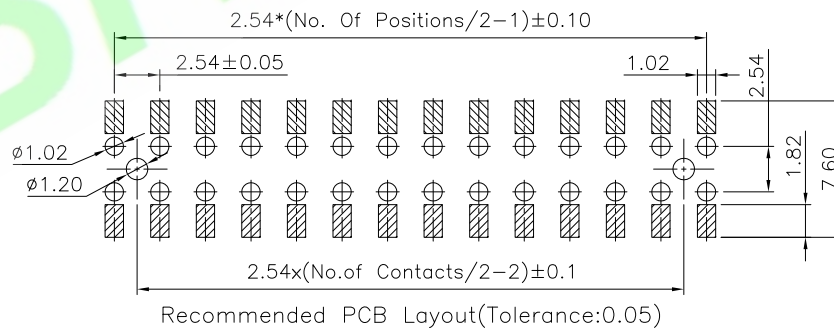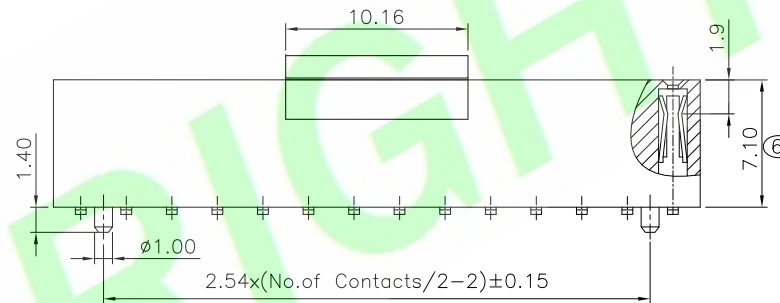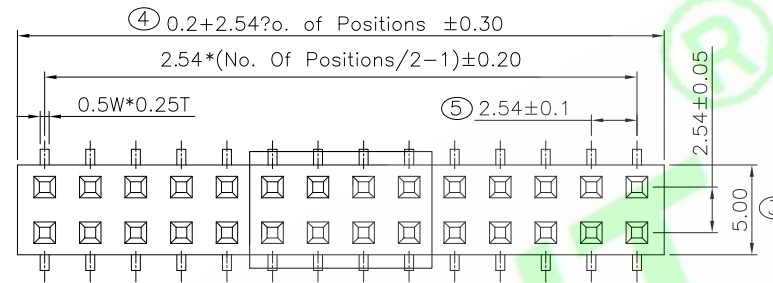

0:W/O Peg



1:W/Peg

5X				DR.BY.:	Jack
4X				CHKD.:	Tony
3X	Increase the PCB hole and "7.4 _{±0.3} " change to "7.5±0.2"	Jack	2016-03-01	APPD.:	Billy
2X	更换盖子	Kenry	2015-09-15		
1X	ORIGINAL	joy chen			
REV.	DESCRIPTION	DR.BY	ECN. NO.		

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : S25512M-XXX71-XX
DWG. NO.: RD0807-152
TITLE : 2.54mm Pitch PCB Socket Header SMT Type
DATE: 14-Jul-2008

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4