

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:10A 30°C Temperature rise

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S39601M-XXQ88-CX-G**

1 2 3 4 5

1: — Series No.

2: — M:SMT Type

3: — No. of Positions





4: — Q: Tin Plated

5: — B:W/O Cap In Tube


D:W/Cap In Tube

F:W/Cap In Tape&Reel

G:W/O Cap In Tape&Reel

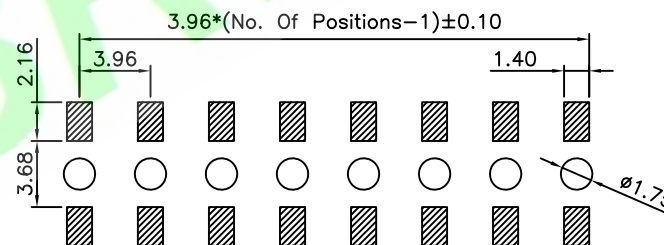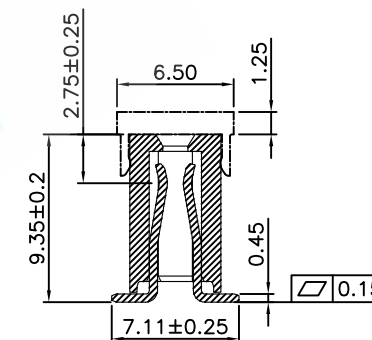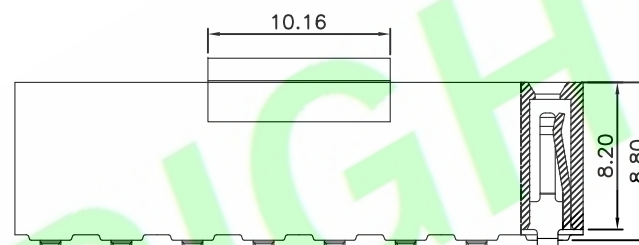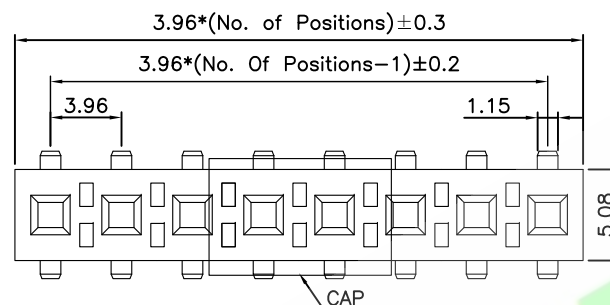

Recommended PCB Layout(Tolerance:0.05)

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S39601M-XXQ88-CX-G	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.: GSN:11S-XXXX				
3X				CHKD.: Tony	X.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch PCB Socket Header SMT Type	SHEET: 1/1		A4	
2X	Add The Picking Code	Kenry	2015-5-28		x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx:	x.xxx': ±1.0°	DATE: 20-Jan-2015				