

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Cooper alloy

Shield:Brass With Tin Plated

Plated:Selective Gold Plated Over Nickel.

Rating:

Current Rating:1.5 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+70°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Mechanical:

Durability:600 Cycles Min

Ordering Information**MJ027R-8P8CX-0C**

1 2 3 4 5 6 7

1:— Series No.

2:— R/R/A Type

3:— No. of Positions

4:— No. of Contact

5:— A:Selective Gold Flash


B:Selective Gold Plated 3μ "(0.075 μ m)C:Selective Gold Plated 6μ "(0.15 μ m)D:Selective Gold Plated 10μ "(0.25 μ m)

6:— O:W/O Flange

7:— A:In bag

B:In Tube

C:In Tray

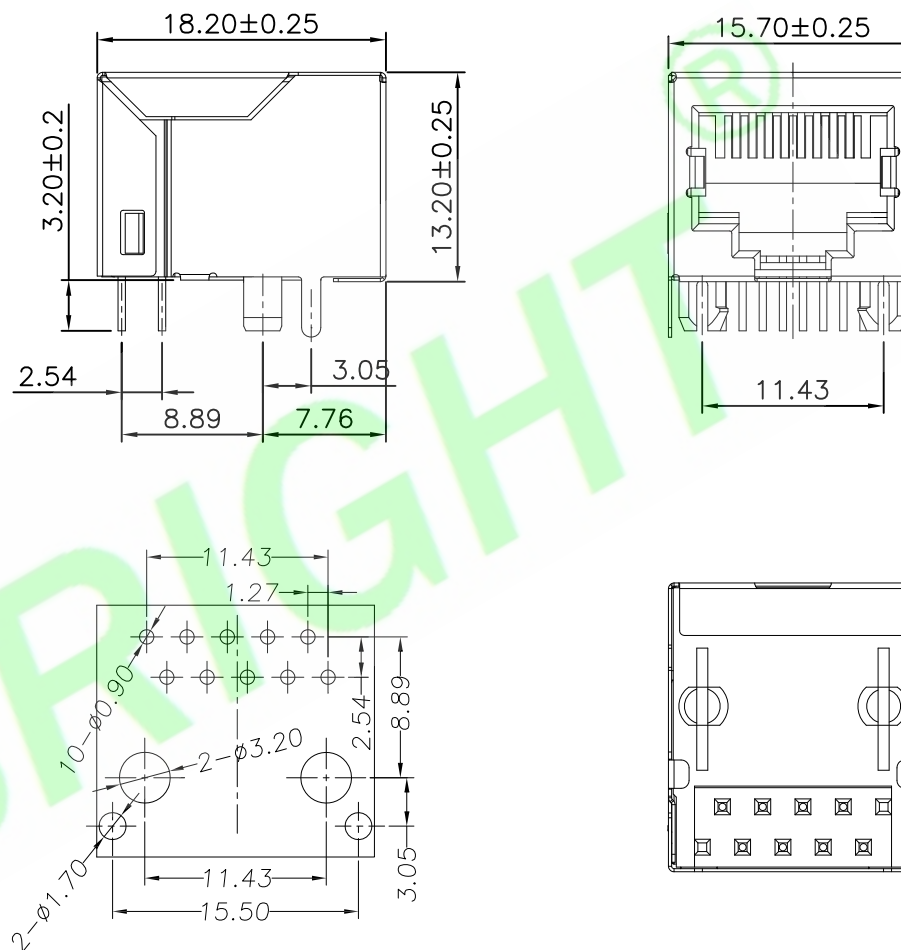

Recommended PCB Layout Tolerance:±0.05

5X				DR.BY.: Jack	GENERAL TOLERANCE:		PART NO : MJ027R-8P8CX-0C	HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					CHKD.: Kenry	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°	TITLE : 8P8C Modular jack R/A Type	SHEET: 1/1	
2X					x.x: ±0.20	x.x': ±3.0°	SCALE: 1:1			
1X	ORIGINAL	Jack		x.xx: ±0.15	x.xx': ±2.0°	DATE: 10-May-2015	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				