

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:Gold Pated

Rating:

Current Rating:1.5 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute





Mechanical:

Durability:750 Cycles Min

Ordering Information**MJ004R-6P6CX-1C**

1 2 3 4 5 6 7

- 1:—Series No.
2:—R/R/A Type
3:—No. of Positions
4:—No. of Contact
5:—B:Gold Plated 3u"
C:Gold Plated 6u"
D:Gold Plated 10u"
E:Gold Plated 15u"
G:Gold Plated 30u"
6:—1:Without Flange
7:—A:In bag
B:In Tube
C:In Tray

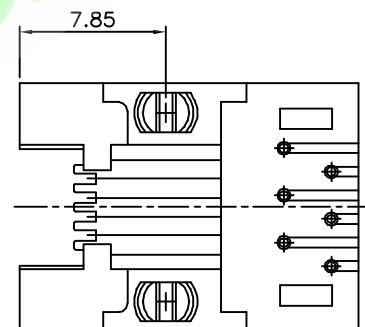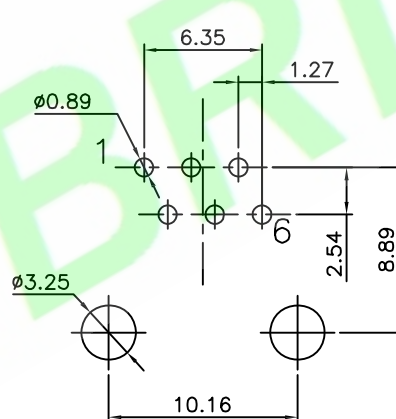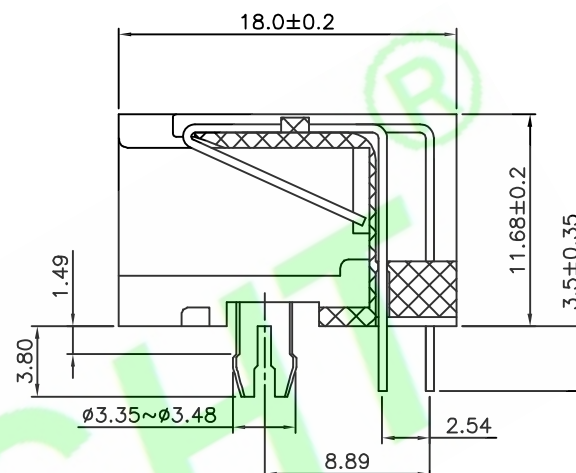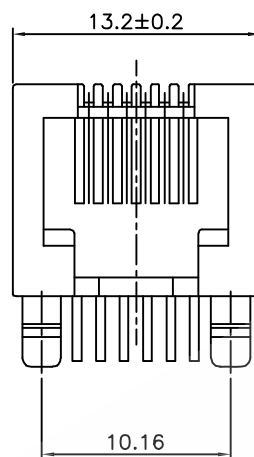

Recommended PCB Layout Tolerance:±0.05

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : MJ004R-6P6CX-1C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0810-002			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 6P6C Modular jack R/A Type			
2X					x.x: ±0.20	x.x': ±3.0°				
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 10-Oct-2008	SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	