

Specifications:**Material And Finish:**

Insulator:High Temp. Plastic(LCP UL94V-0)

Insulator Color:Black

Contact:Phosphor Bronze

Plated:Gold Plating on Contact and Tin Plating
on Solder tail, over nickel Plating**Rating:**

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:750V AC/Minute



Ordering Information**ATABSV-22X-01-X**

1 2 3 4 5

- 1:— Series No.
2:— V:Vertical SMT Type
3:— No. of Positions
4:— H:Selective Gold Plated
K:Selective Gold 5U"
L:Selective Gold 10U"
M:Selective Gold 15U"
P:Selective Gold 30U"
5:— B:In Tube
E:W/Cap In Tube

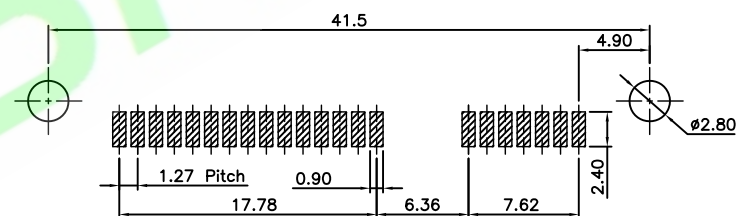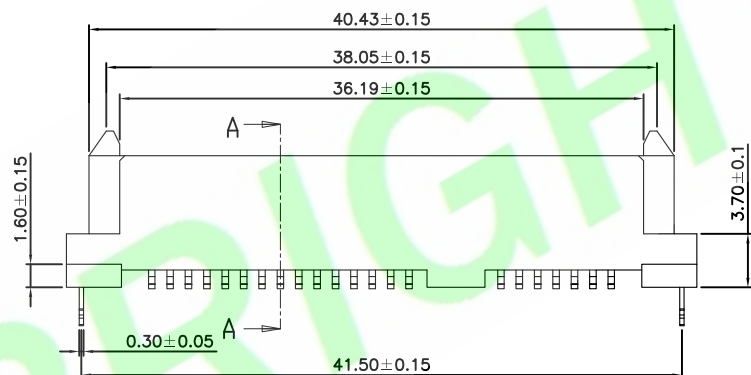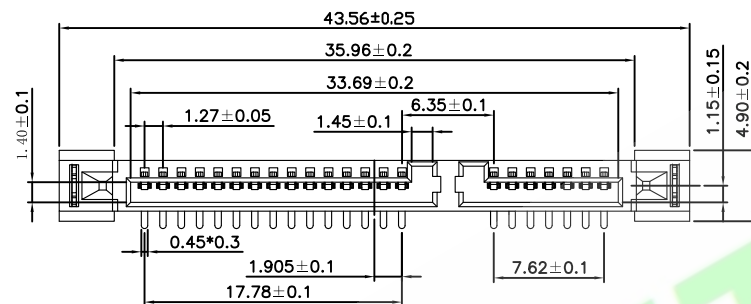

Recommended PCB Layout
DEF AULT TOLERANCE:±0.05

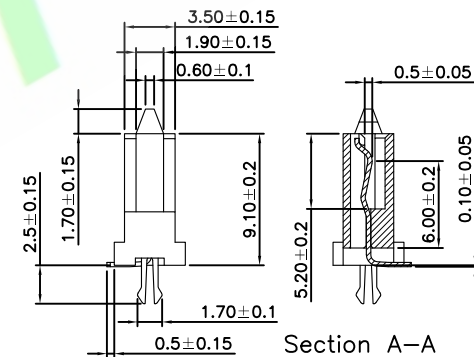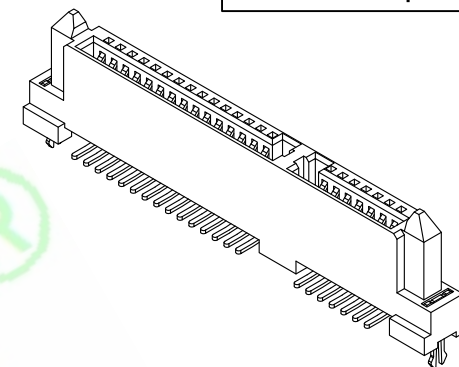


5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Samson
CHKD:	Tony
APPD:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : ATABSV-22X-01-X
DWG. NO.: RD0805-032
TITLE : SATA 7+15P Female Vertical SMT Typ
DATE: 07-May-2008

HJBRIGHT 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		