





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

1	2	3	4	5
---	---	---	---	---

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
- 5: — A: In bag
B: In Tube
C: In Tray

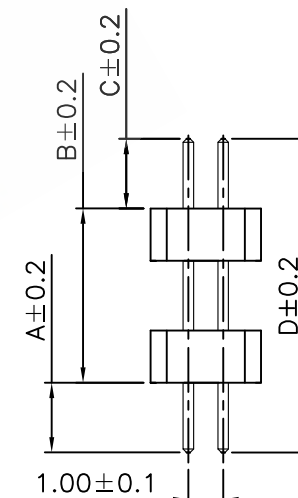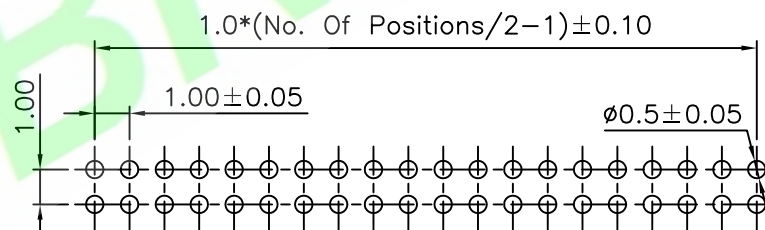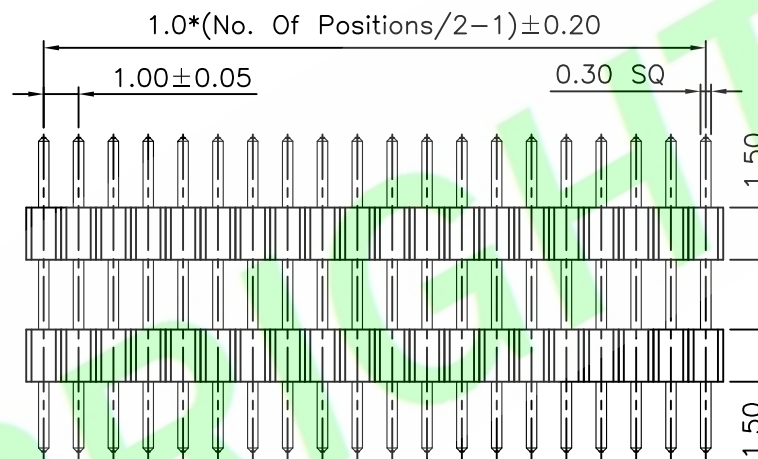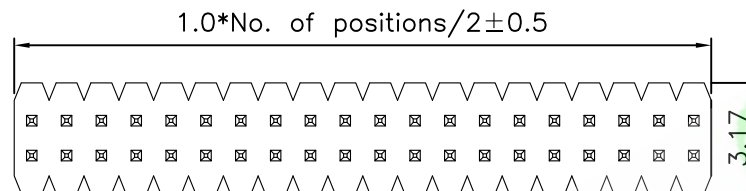

Recommended PCB Layout

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 100322S-XXXXXX-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINEAR	ANGLES	DWG. NO.:			
3X			CHKD.: Tony	x.: ±0.30	x": ±5.0°	TITLE :			
2X				x.x: ±0.20	x.x": ±3.0°	1.0mm Pitch Pin Header Straight Type			
1X	ORIGINAL	Samson	APPD.: Billy	x.xx: ±0.15	x.xx": ±2.0°	DATE: 24-Mar-2015			
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.10	x.xxx": ±1.0°		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
							SCALE: 1:1		
							UNIT: mm		