

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.




Withstanding Voltage:500V AC/Minute

Ordering Information


10022R-XXXXXX-X

1 2 3 4 5

- 1:— Series No.
- 2:— R:R/Atype
- 3:— No. of Positions
- 4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5:— A:In bag
B:In Tube

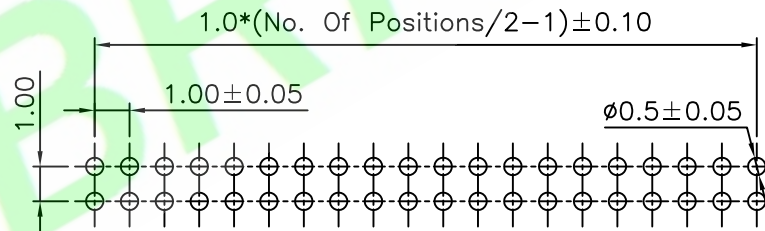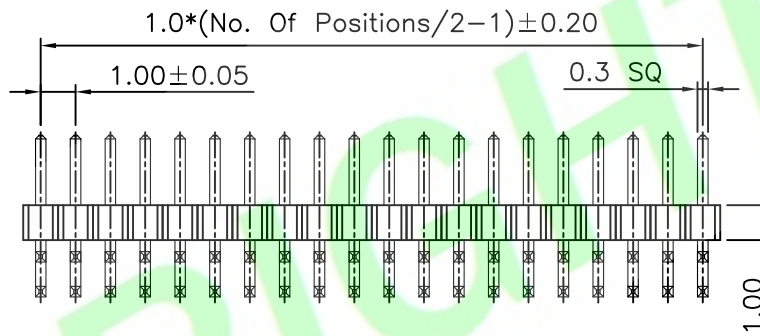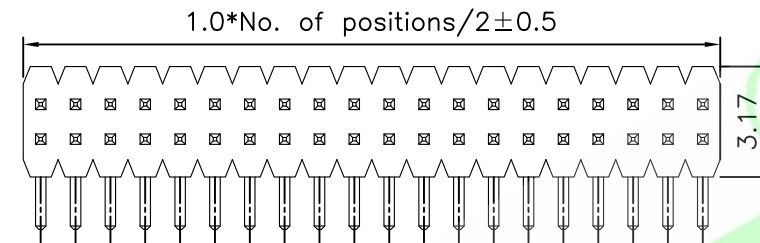

Recommended PCB Layout

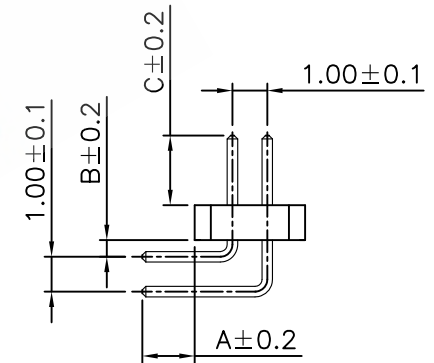

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 10022R-XXXXXX-X	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X					LINEAR	ANGLES	DWG. NO.: RD0805-120					
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 1.0mm Pitch Pin Header R/A Type	DATE: 24-May-2008	UNIT: mm	SCALE: 1:1	THIRD ANGLE PROJECTION	
2X					X.X: ±0.20	X.X': ±3.0°						
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						