

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information10011S-XXXXXX-X1 2 3 4 5

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:Gold Flash
G:30u" Gold
5:— A:In bag

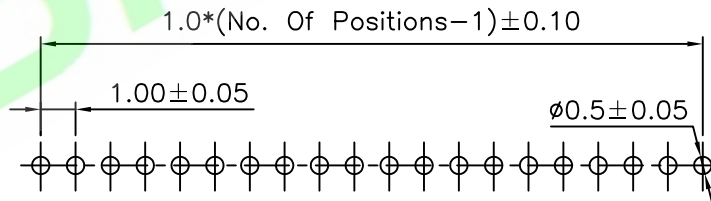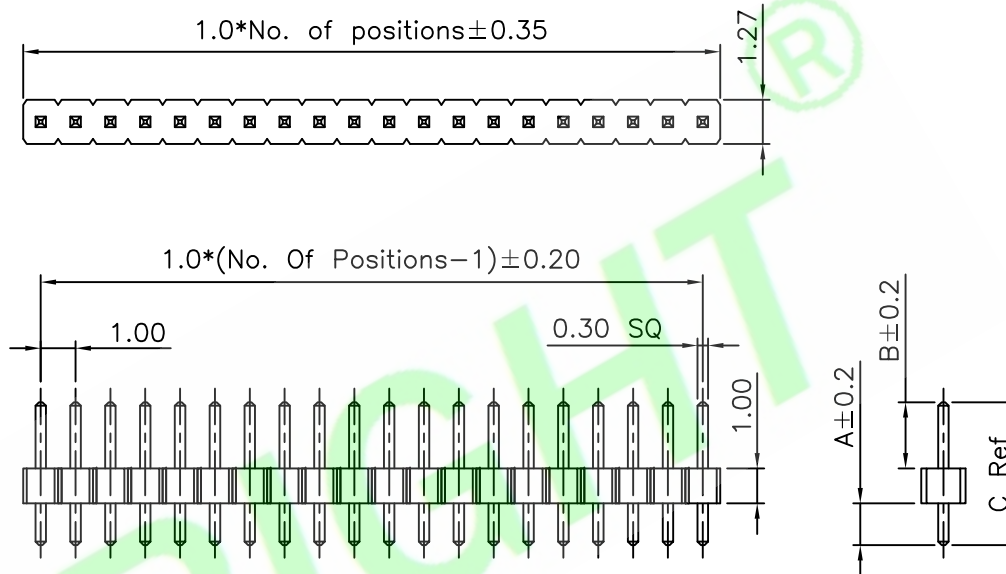

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 10011S-XXXXXX-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES									
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	DWG. NO.:		SHEET: 1/1			A4			
2X					x.x: ±0.20	x.x°: ±3.0°	TITLE :		SCALE: 1:1						
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	1.0mm Pitch Pin Header Straight Type		UNIT: mm						
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 21-Aug-2014								
1		2		3		4		5		6		7		8	