

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

10011R-XXXXXX-X

1 2 3 4 5

1:— Series No.

2:— R:R/Atype

3:— No. of Positions





4:— A:Gold Flash

H:Selective Gold Plated


Q:Tin Plated

5:— A:In bag

B:In Tube

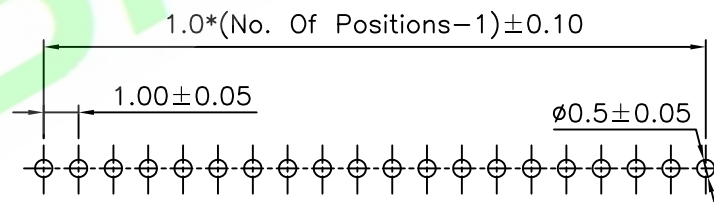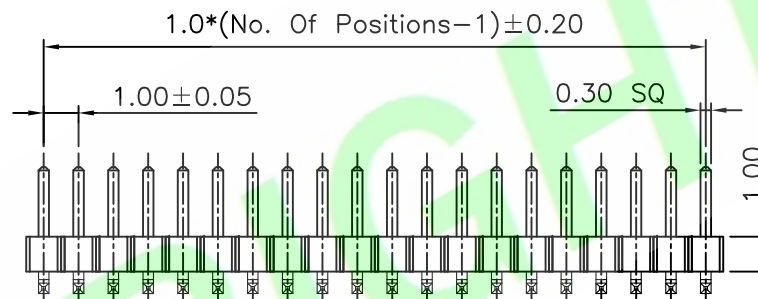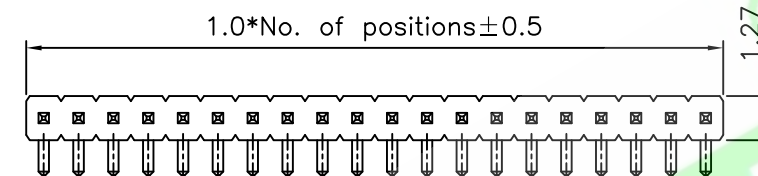

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 10011R-XXXXXX-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0805-114				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.0mm Pitch Pin Header R/A Type		SHEET: 1/1		A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 24-May-2008		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					