


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 5:—A:In bag
B:Tube
C:Tray

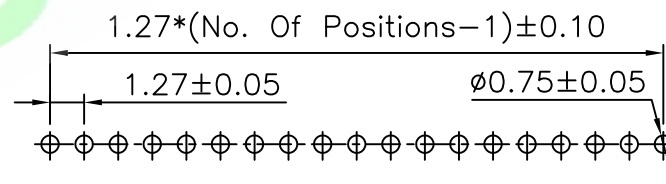

Recommended PCB Layout

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 27541S-XXXXXX-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINEAR	ANGLES	DWG. NO.: RD1112-008			
3X			CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X				x.x: ±0.20	x.x': ±3.0°	1.27mm Pitch Pin Header Straight Type	SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 24-Dec-2011	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.10	x.xxx': ±1.0°				