

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**27541R-XXXXXX-X**

1 2 3 4 5

1:— Series No.

2:— R/R/A Type

3:— No. of Positions

4:— A:Gold Flash





H:Selective Gold Plated

Q:Tin Plated

5:— A:In bag

B:Tube

C:Tray

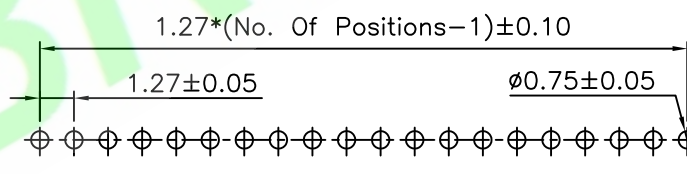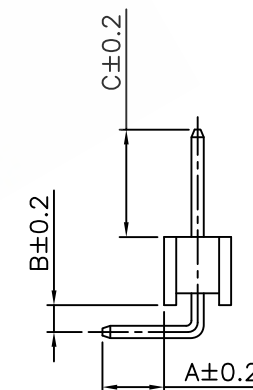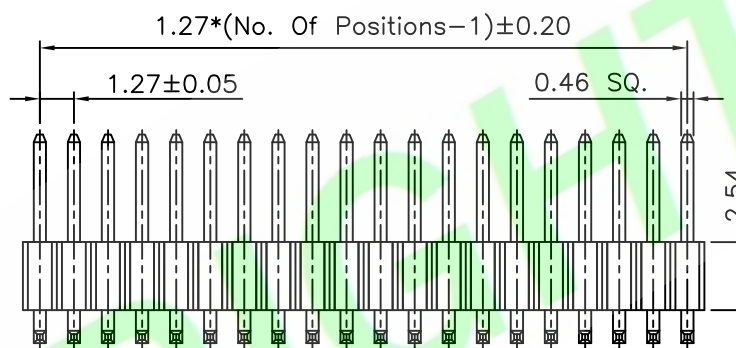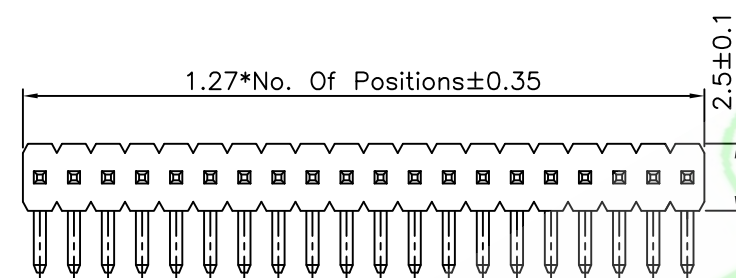

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 27541R-XXXXXX-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0807-265					
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header R/A Type	SHEET: 1/1				
2X				Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1				
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Jul-2008					