

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12792R-XXXXXX-NX

1 2 3 4 5

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash





H:Selective Gold Plated

Q:Tin Plated


5:— A:In bag

B:In Tube

C:In Tray

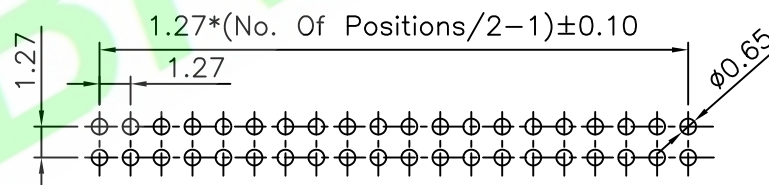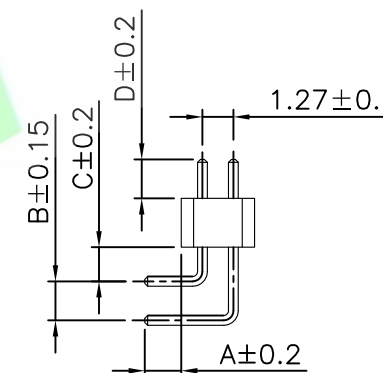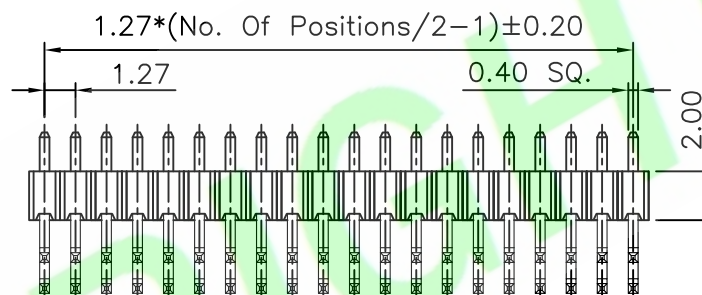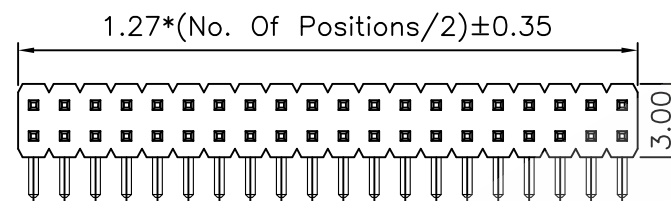

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : 12792R-XXXXXX-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Samson	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X				Tony	X.X: ±0.20	X.X': ±3.0°	1.27mm Pitch Pin Header R/A Type	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 9-Nov-2013	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°			A4