





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: In Tube
C: In Tray

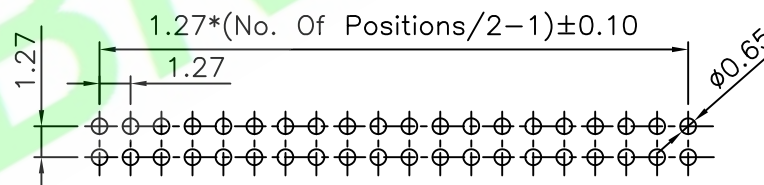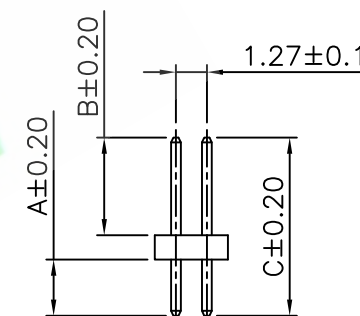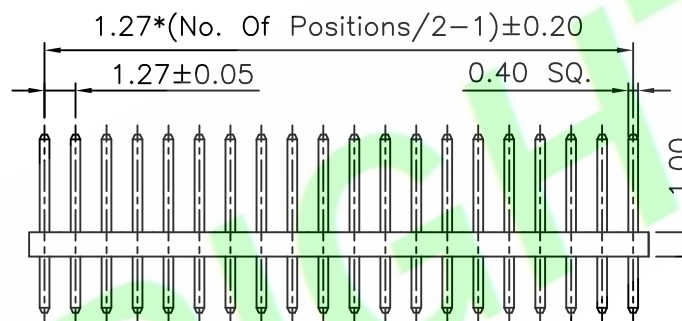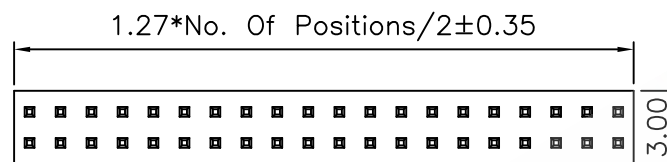

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 12812S-XXXXXX-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINEAR	ANGLES	DWG. NO.: RD0807-296				
3X			CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE : 1.27mm Pitch Pin Header Straight Type				
2X	Modify dim ㉔	Samson		x.x: ±0.20	x.x': ±3.0"	DATE: 30-Jul-2008		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
1X	ORIGINAL	Samson	APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"			SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.10	x.xxx': ±1.0"			UNIT: mm		

A4