






Plated: See Ordering Information

Operating Temperature Range: -40°C to +105°C

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: In Tube
C: In Tray

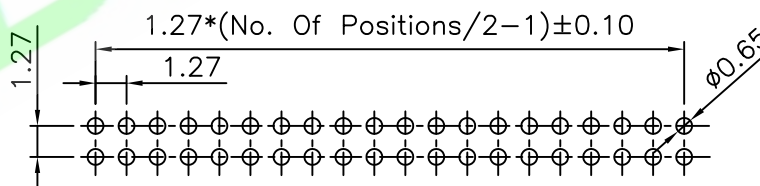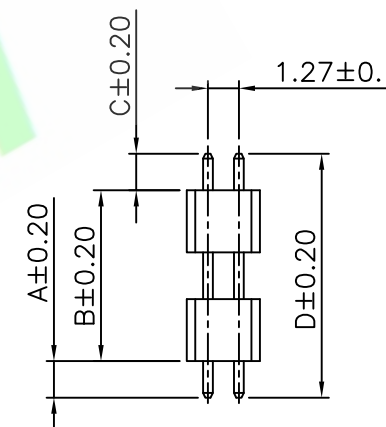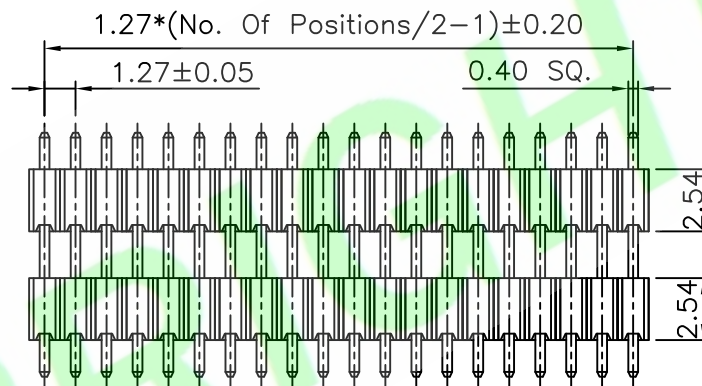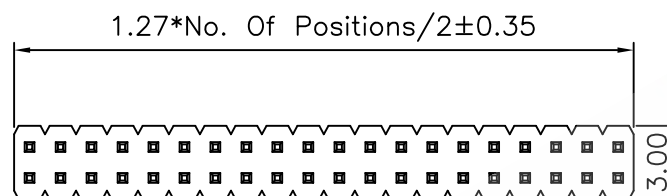

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 128422S-XXXXXX-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES			
3X			CHKD.: Tony	X.: ±0.30	X°: ±5.0°	TITLE : 1.27mm Pitch Pin Header Straight Type	SHEET: 1/1		A4
2X	Modify dim ⑤	Samson		X.X: ±0.20	X.X°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.: Billy	X.XX: ±0.15	X.XX°: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 30-Jul-2008			