

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20021H-XXXXXX-NX

1 2 3 4 5

1:— Series No.

2:— H: Straight SMT Type

3:— No. of Positions

4:— A: Gold Flash

H: Selective Gold Plated





Q: Tin Plated

5:— A: In Bag


B: In Tube

C: In Tray

F: W/CAP In Tape&Reel

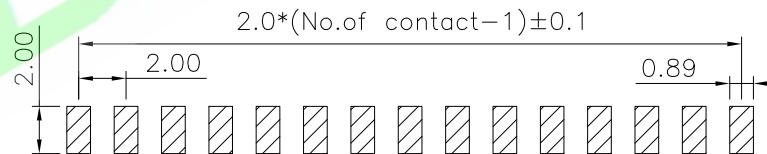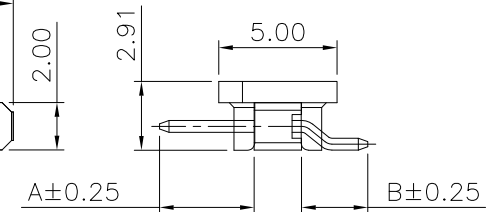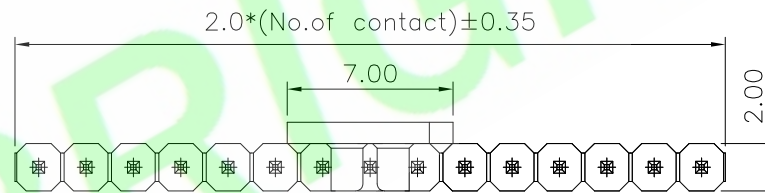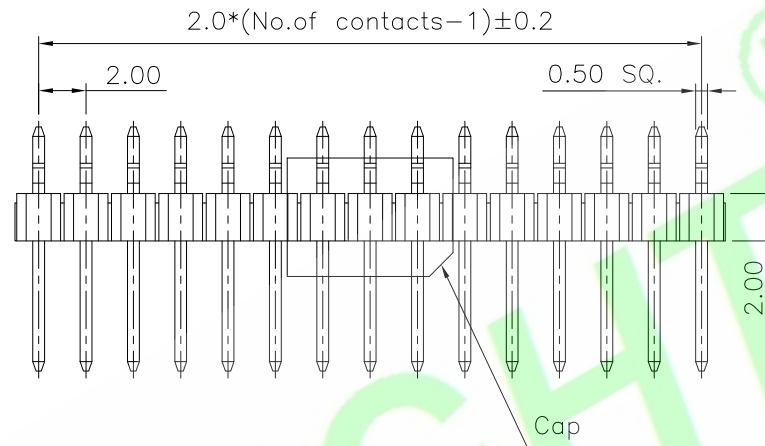

Recommended PCB Layout(Tolerance:0.05)

5X				DR.BY.:	Jack	GENERAL TOLERANCE:	PART NO : 20021H-XXXXXX-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					Jack	LINEAR	DWG. NO.:		
3X				CHKD.:	Kenry	ANGLES	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					Kenry	X.: ±0.30	2.0mm Pitch	SCALE: 1:1	
1X	ORIGINAL	Jack		APPD.:	Billy	X.X: ±0.20	Pin Header Straight SMT Type	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XX: ±0.15	DATE: 18-Sep-2015		A4
						X.XXX: ±0.10			