

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

20022M-XXXXXX-NX

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

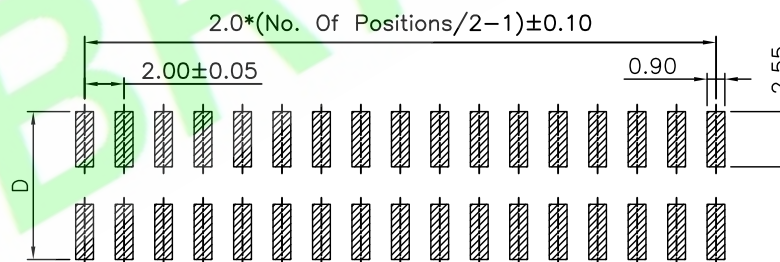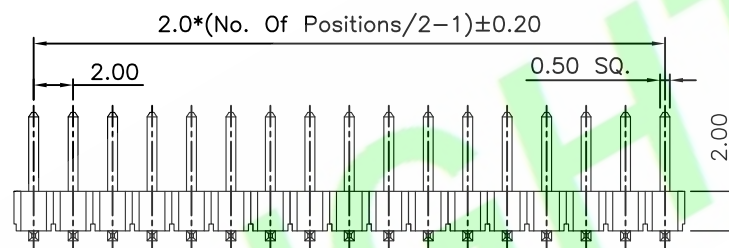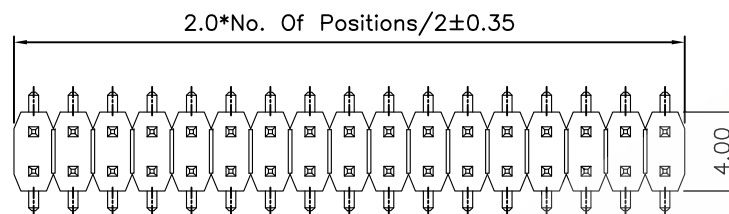

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : 20022M-XXXXXX-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	THIRD ANGLE PROJECTION	A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:					
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type	DATE: 29-May-2014		SCALE: 1:1		
2X					X.X: ±0.20	X.X': ±3.0°		UNIT: mm				
1X	ORIGINAL	Kenry			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						