





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
- 2:— K:"K" Type
- 3:— No. of Positions
- 4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5:— A:In bag
B:In Tube
C:In Tray

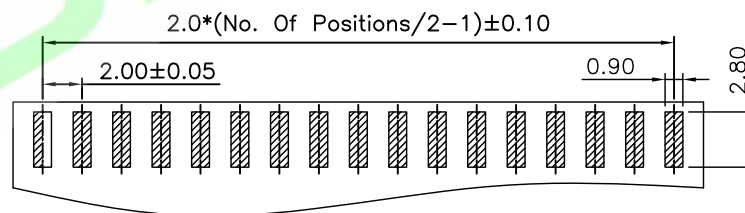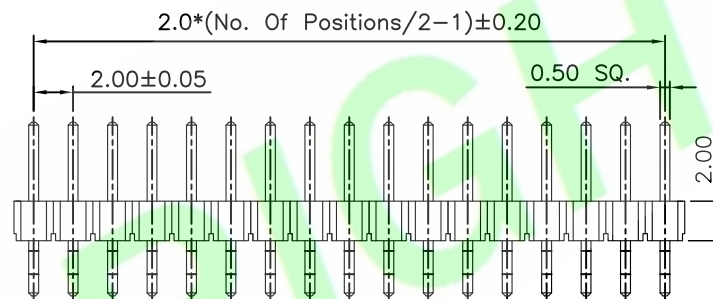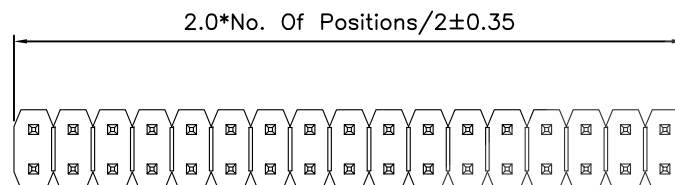

Recommended PCB Layout

5X			DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : 20022K-XXXXXX-X	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINEAR	ANGLES	DWG. NO.: RD0807-232			
3X			CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : 2.0mm Pitch Pin Header Kink Type	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X				x.x: ±0.20	x.x*: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	joy chen	APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 26-Jul-2008	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx*: ±1.0°			

HJBRIGHT

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4