




Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
F:W/Cap In Tape&Reel

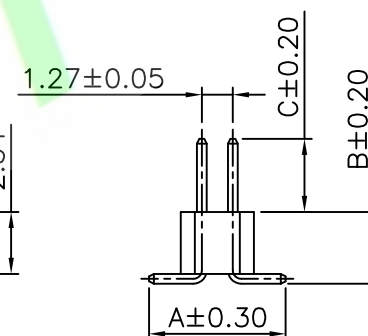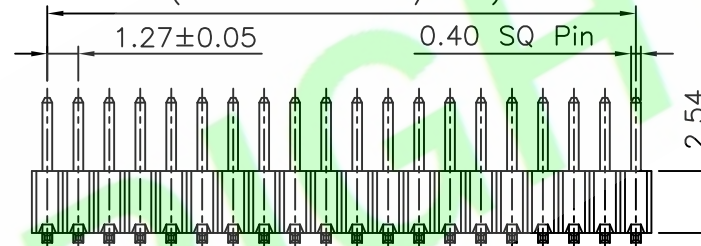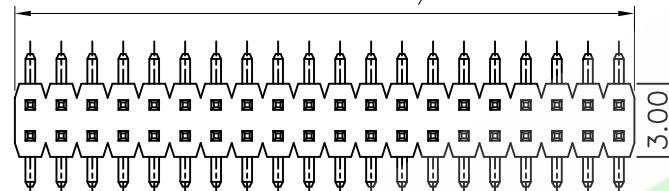

Recommended PCB Layout

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : 12842M-XXXXXX-0X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0807-080			
3X			CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header SMT Type	SHEET: 1/1		A4
2X	Modify dim ⑤	Samson	Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 08-Jul-2008		