

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:500V AC/Minute

Ordering Information



20014S-XXXXXX-NX


1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: Tube
C: Tray

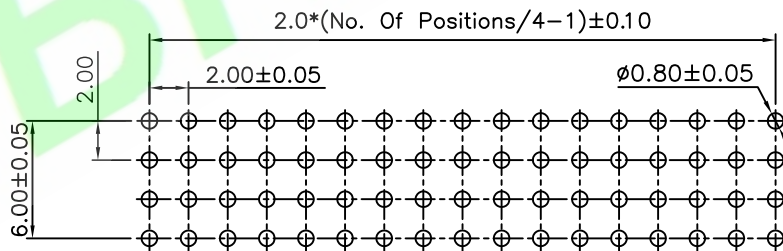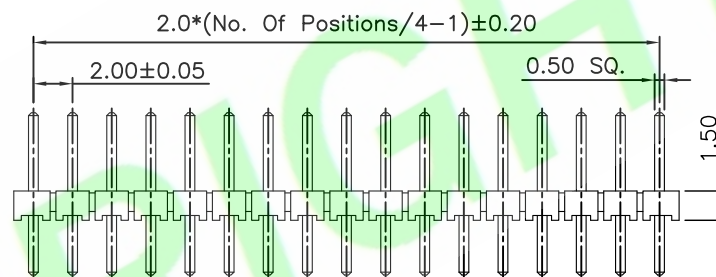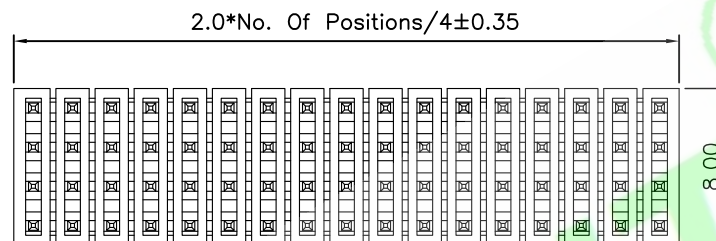

Recommended PCB Layout

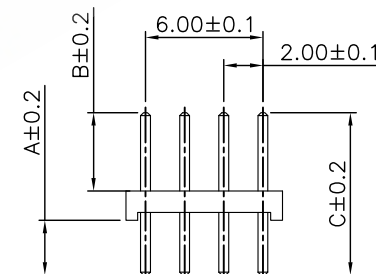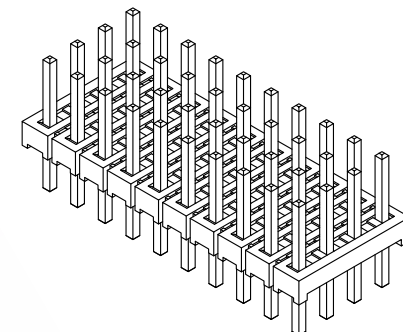

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : 20014S-XXXXXX-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X				joy chen	LINEAR	ANGLES	DWG. NO.: RD0807-240								
3X				CHKD:	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Pin Header Straight Type		SHEET: 1/1			A4			
2X				Tony	X.X: ±0.20	X.X': ±3.0°			SCALE: 1:1						
1X	ORIGINAL	joy chen		APPD:	X.XX: ±0.15	X.XX': ±2.0°			UNIT: mm				THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 23-Jul-2008								
1		2		3		4		5		6		7		8	