



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— U:U Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

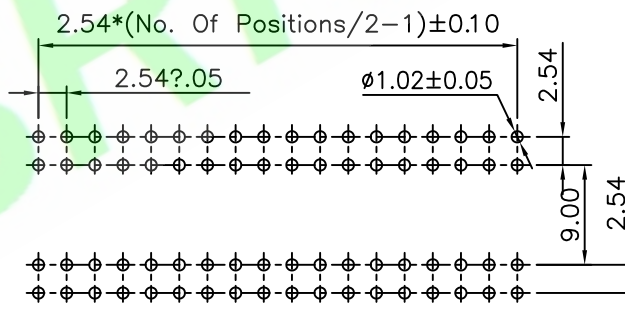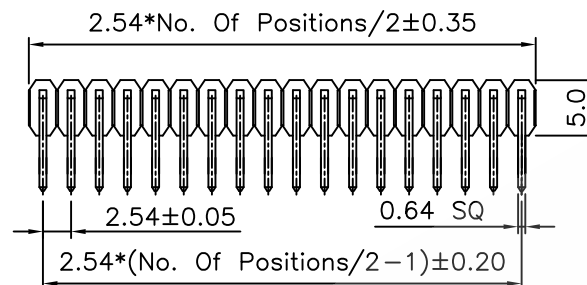

Recommended PCB Layout

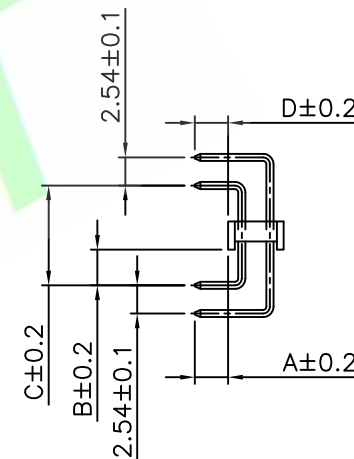


5X			DR.BY.:	joy chen	GENERAL TOLERANCE:		PART NO : 25412U-XXXXXX-X	HJBRIGHT [®] 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		 THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES	DWG. NO.: RD0807-206				
3X			CHKD.:	x.: ±0.30	x': ±5.0"	TITLE : 2.54mm Pitch Pin Header "U" Type					
2X			Tony	x.x: ±0.20	x.x': ±3.0"						
1X	ORIGINAL	joy chen	APPD.:	x.xx: ±0.15	x.xx': ±2.0"						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0"	DATE: 21-Jul-2008	SHEET: 1/1			
								SCALE: 1:1			
								UNIT: mm			

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1 / 1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4