

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**25431R-XXXXXX-X**

1 2 3 4 5

1:— Series No.

2:— R/R/A Type

3:— No. of Positions





4:— A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

5:— A:In bag

B:In Tube

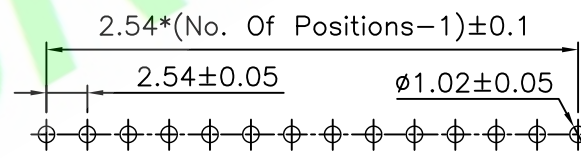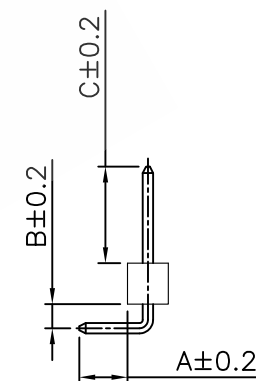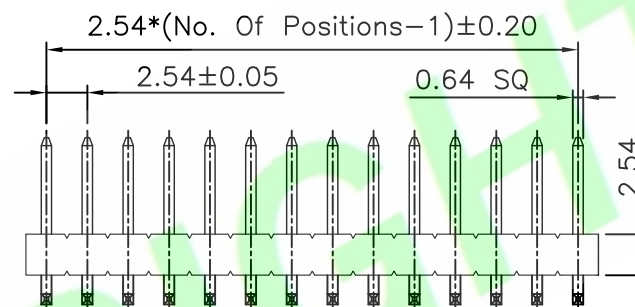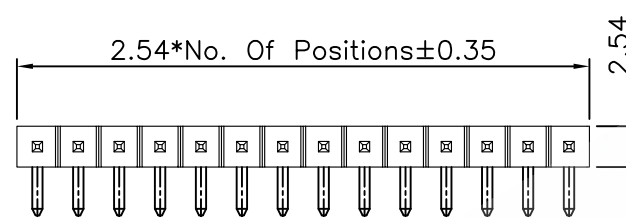

Recommended PCB Layout

5X				DR.BY.: Joy chen	GENERAL TOLERANCE:		PART NO : 25431R-XXXXXX-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0807-190			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Pin Header R/A Type	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 18-Jul-2008		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°		THIRD ANGLE PROJECTION		