

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information


254222R-XXXXXX-X

1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

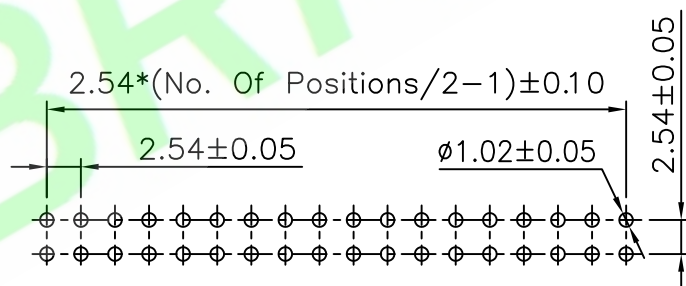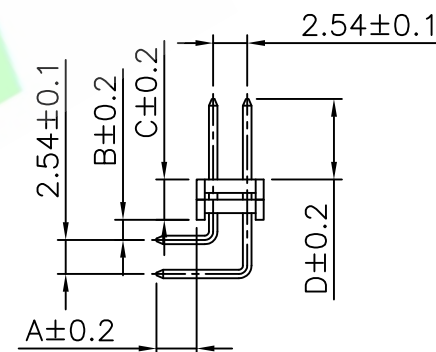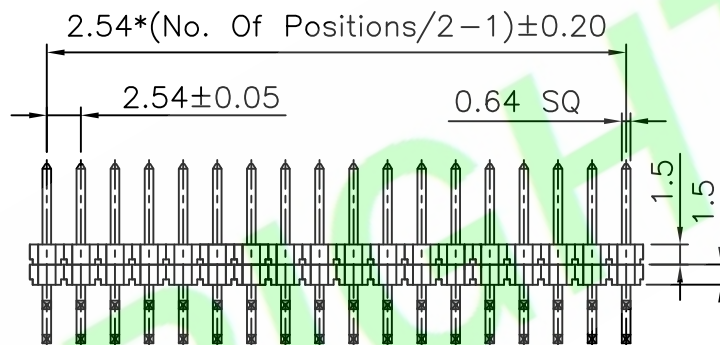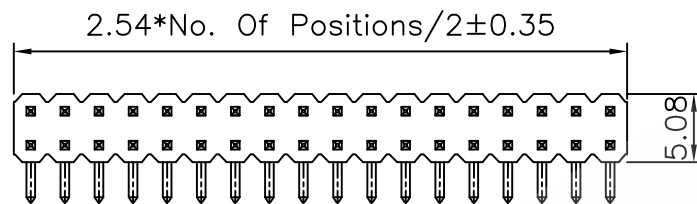

Recommended PCB Layout

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : 254222R-XXXXXX-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.: RD0807-215		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch Pin Header R/A Type	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.20	X.X': ±3.0°	DATE: 21-Jul-2008	SCALE: 1:1	
1X	ORIGINAL	joy chen			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4