

Specifications:**Material And Finish:**

Insulator: HTNFR52G30NH BK337 UL94V-0

Color: Black

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 7.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 20m Ohm Max








Insulator resistance: 1000M ohm min.


Withstanding Voltage: 1500V AC/Minute

Ordering Information**39612R-XXXXXX-NX**

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated.
S: Matte Tin Plated
5: — A: In bag
B: In Tube
C: In Tray

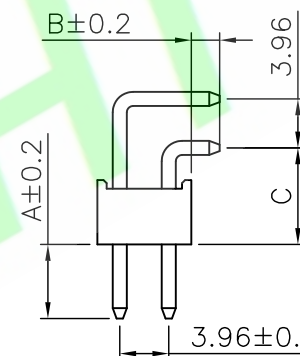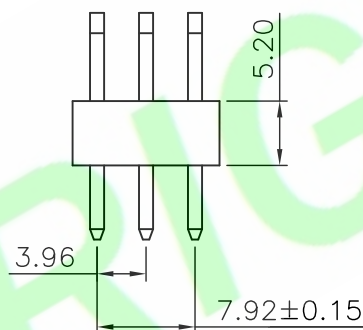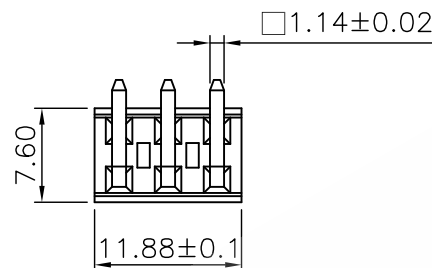

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 39612R-XXXXXX-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X				Kenry	LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch R/A Type Connector		SHEET: 1/1			A4			
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 21-Nov-2016								
1		2		3		4		5		6		7		8	