

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**15011S-XXXXXX-NX**

1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
Q: Tin Plated
5:— A: In Bag

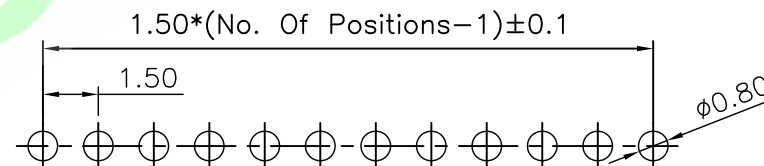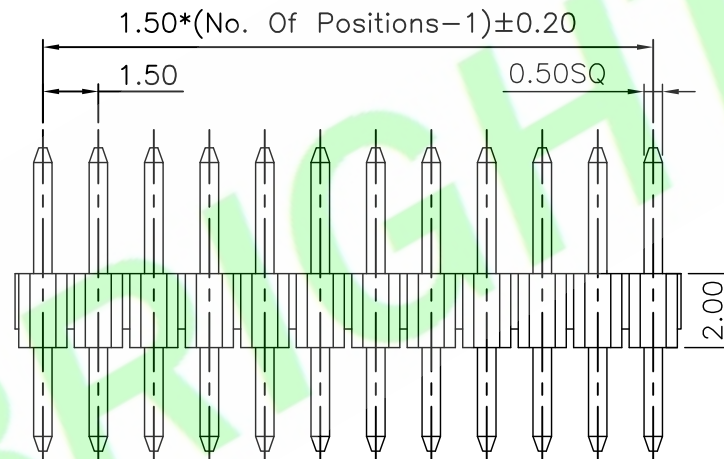

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 15011S-XXXXXX-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION	A4
4X				Samson	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 1.50mm Pitch Pin Header Straight Type					
2X				Tony	X.X: ±0.20	X.X': ±3.0°	DATE: 9-Feb-2015					
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°						
	1	2		3	4		5	6	7			8