

Specifications:**Material And Finish:**

Insulator:PPS UL94V-0 Color:Black
Contact:Brass,Machined CuZn38Pb2
Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
Operating Voltage:60VAC/DC
Operating Temperature Range:-40° ~+105° C





Electrical:

Contact resistance: $\leq 4\text{m}\Omega/\text{Contact}$.
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information**D2541S-04A-03-A**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
5: — A: In bag

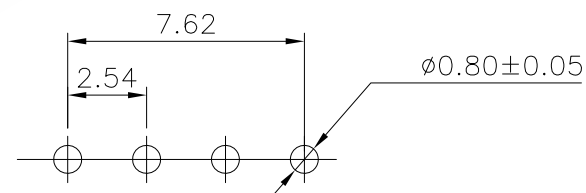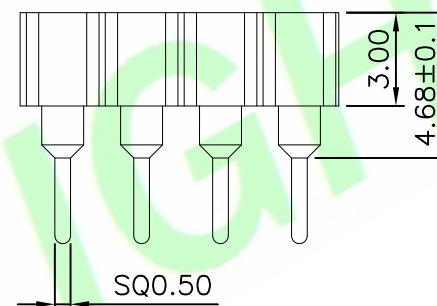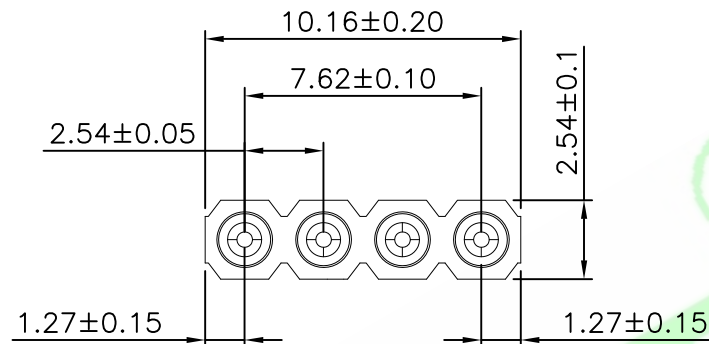

PCB LAYOUT

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : D2541S-04A-03-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : IC Socket DIP Type		SHEET: 1/1			A4			
2X	依客户要求, 更改为专用图纸	Aaron	20180720		x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 3-Aug-2015		UNIT: mm				THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx*: ±1.0°									
1		2		3		4		5		6		7		8	