

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-30°~+80°C

Electrical:

Contact resistance:50m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:100V AC/Minute

Ordering Information**USBR-04FH-01-XC**

1 2 3 4 5 6 7

1: — Series No.

2: — R:R/A Type

3: — No. of Positions





4: — F:Female

5: — H:Selevtive Gold Plated

6: — B:Black

W:White

7: — C:In Tray

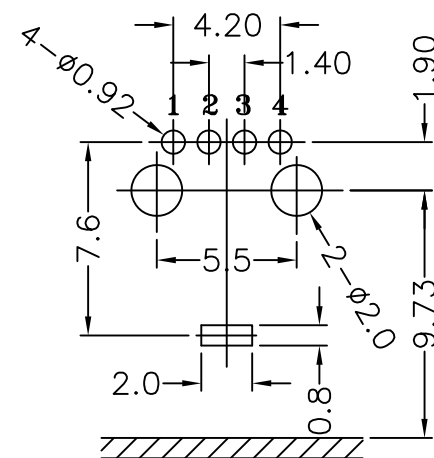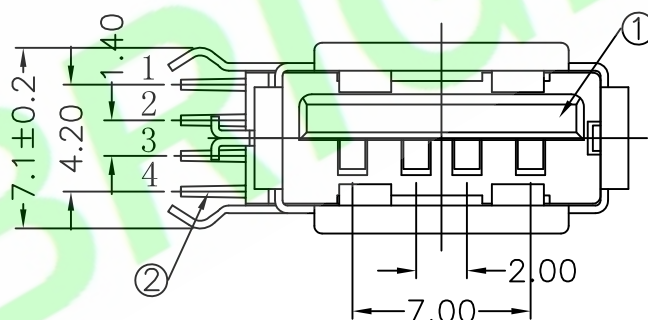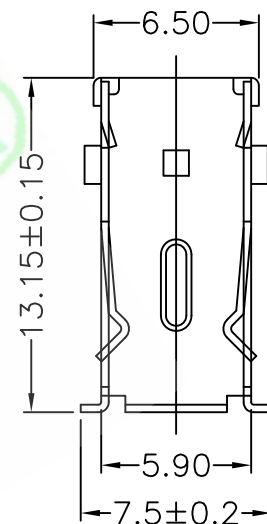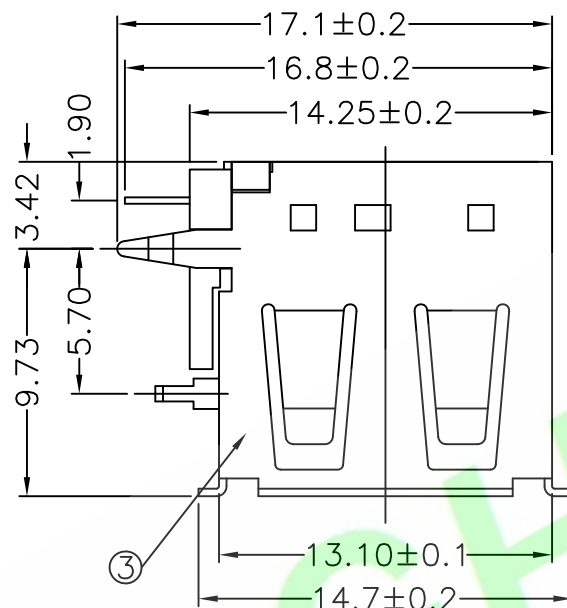

PCB board edge

3	SHELL	C2680H T=0.30	Ni:35~50u"	1
2	TERMINAL	C5191H T=0.25	Sn&Au	4
1	HOUSING	PA9T UL 94V-0	WHITE / BLACK	1
NO.	NAME	MATERIAL	FINISH	Q'TY

5X				DR.BY: Kenry
4X				
3X				CHKD: Tony
2X				
1X	ORIGINAL		Kenry	APPD: Billy
REV.	DESCRIPTION	DR.BY	ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.20	X': ±5.0°
X.X: ±0.15	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : USBR-04FH-01-XC

DWG. NO.:

TITLE :

4P USB AF-90° 側立式<短体>


DATE: 10-Aug-2015

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4