

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Copper Alloy,t=0.3mm

Shell:SUS301

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:30V AC/DC

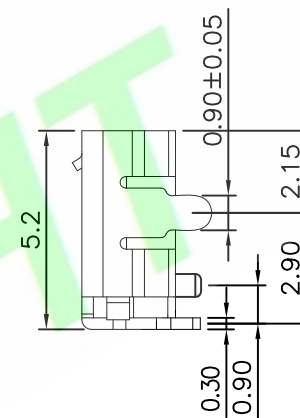


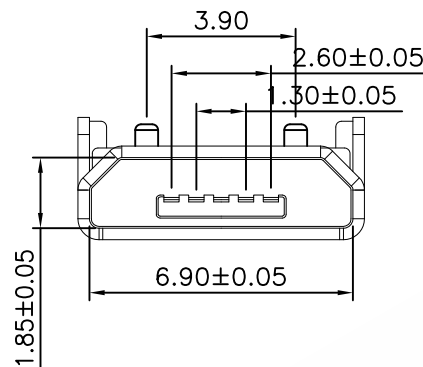
Operating Temperature Range:-30~+80°C

Electrical:

Contact resistance:40m Ohm Max

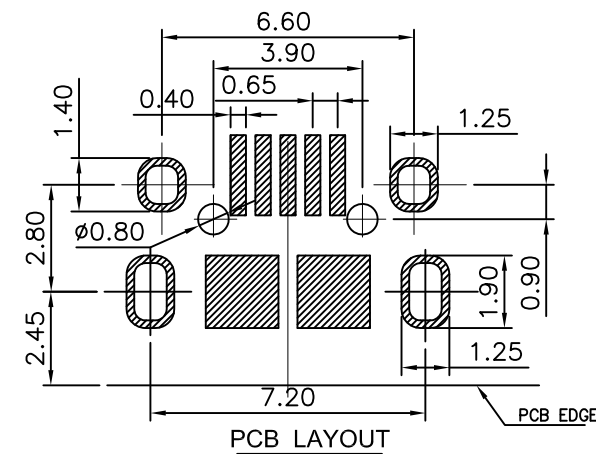
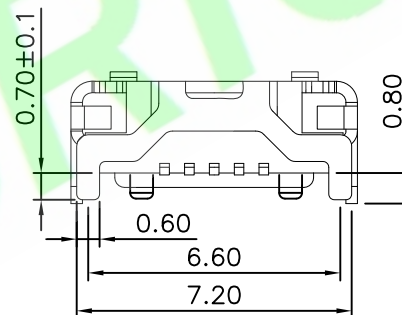
Insulator resistance:100M ohm min.

Withstanding Voltage:100V AC/Minute

**Ordering Information****MUSBF-B5MX-13-D**

1 2 3 4 5 6 7

- 1: — Series No.
 2: — F:Female
 3: — B:B Type
 4: — No. of Positions
 5: — M:SMT Type
 6: — A:Gold Flash
 H:Selective Gold Flash
 7: — D:Tape&Reel



5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : MUSBF-B5MX-13-D	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	X.:	X': ±5.0°	TITLE : MICRO USB 5P/F B 牛角外0.8 (7.15*6.6) 加長0.3 帶柱 0.3厚	SHEET: 1/1		A4
2X					X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°		DATE: 20-Aug-2015		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°				