
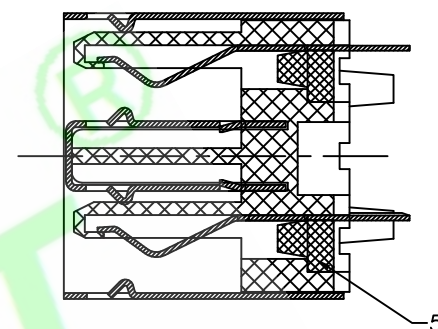
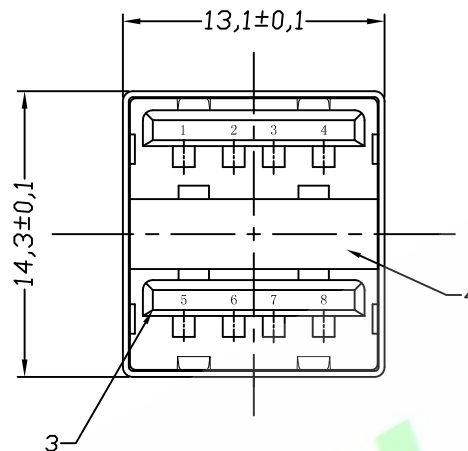


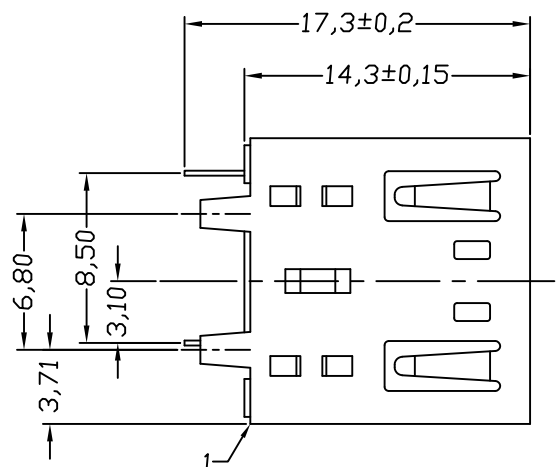

Specifications:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage:
500 V(ac) for 1 minute.
- 1.3 Contact resistance: 30mΩ Max.
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Total mating force: 3.57 Kg Max.
- 1.6 Total unmating force: 1.0 Kg Min.
- 1.7 Temperature range: -45℃ ~ +85℃.

5	后塞	1	PBT 30%G		COLOR: BLACK
4	中夹片	1	黄铜	NICKEL PLATING	
3	胶蕊	1	PBT 30%G		COLOR: BLACK
2	端子	8	C5191H	NICKEL PLATED OVER ALL 30μ" TIN/GOLD PLATING	GOLD/10μ"
1	外壳	1	Fe	NICKEL PLATING	
序号	名 称	数 量	材 料	表 面	备 注

5X				DR.BY:	
4X				Kenry	
3X				CHKD.:	
2X				Tony	
1X	ORIGINAL		Kenry	APPD.:	
REV.	DESCRIPTION		DR.BY	ECN.	NO.


DR.BY:	Kenry
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.30
X.X: ±0.30	X.XX: ±0.20
X.XX: ±0.20	X.XXX: ±0.15
X.XXX: ±0.15	X.XXX: ±1.0°

PART NO : USBF-AHB-2S-C
DWG. NO.:
TITLE : USB-AF-180° 双层插板短体无边 (四脚)
DATE: 08-Mar-2016

HJBRIGHT® 东莞市华晶电子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4