

NOTES:

1.MATERIAL SPECIFICATION

- 1) INSULATION MATERIAL THERMOPLASTIC.
- 2) SHELL:SPCC,T:0.30mm
PLATING: NICKEL
- 3) TERMINAL:COPPER ALLOY,T:0.25mm
PLATING: GOLD/TIN PLATED.

2.ELECTRICAL CHARACTERISTIC:

- 1)INSULATION RESISTANCE:1000M Ω MIN.
- 2)CONTACT RESISTANCE:30m Ω MAX.
- 3)WITHSTANDING VOLTAGE:500V AC.

3.MECHANICAL CHARACTERISTICS:

- 1)INSERTION FORCE:3.57Kgf MAX.
- 2)EXTRACTION FORCE:1.02Kgf MIN.
- 3)DURABILITY:1500 CYCLES EXTRACTION
FORCE:10~35N

4.ENVIRONMENTAL:






OPERATING TEMPERATURE:-55°C~+85°C


Ordering Information

USBR-04FH-02-XC

1 2 3 4 5 6 7

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — F:Female
5: — H:Selevtive Gold Plated
6: — B:Black
W:White
7: — C:In Tray

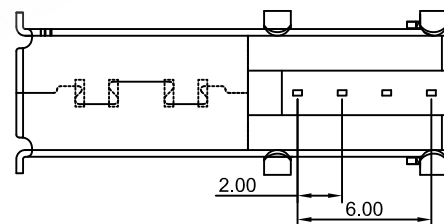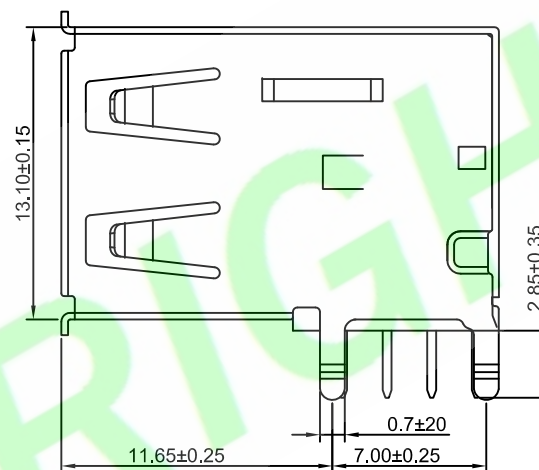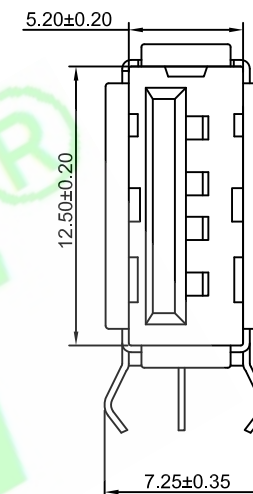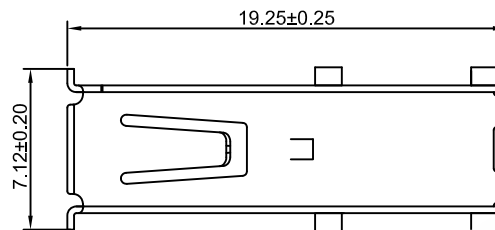

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : USBR-04FH-02-XC		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X						LINEAR	ANGLES	DWG. NO.: A02-XXXXXXXX-7021							
3X				CHKD.: Tony	x:	x°: ±5.0°	TITLE : USB A/F DIP 90度加盖弯脚侧插式长体有后盖		SHEET: 1/1			A4			
2X					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1						
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	USB A/F DIP 90度加盖弯脚侧插式长体有后盖		UNIT: mm						
REV.	DESCRIPTION	DR.BY	ECN. NO			x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 23-May-2017							
1		2		3		4		5		6		7		8	